














Shop online at <https://www.vedardalarm.com>



HiFi video review alarm host (HIFI-ALARM-NVR GPRS or 4G for backup communication)

	HIFI-NVR-3200	9-way NVR GPRS Alarm Controller	IR remote control 1	1	<p>Video features:</p> <p>• Video access: 9*IPC1080P(HIFI-NVR-3200) • Synchronous playback: 4*IPC1080P • Compression method: H.265 • Video output: 1ch HDMI, • Transmission method: LAN or WIFI (support WIFI relay forwarding). • System performance: preview/record/playback/backup/network monitoring. • Dual identification of moving image alarm and probe space intrusion alarm. • Mobile APP video monitoring, intelligent home appliance control. • P2P/cross-platform does not require IE control/platform/Onvif protocol.</p> <p>Alarm features: •</p> <p>System capacity: 96 wireless devices (including smart home) + 32 single bus defense zones • Defense mode: overall arming and disarming, 8 divisions arming and disarming, independent arming and disarming. • GSM communication: SMS arming and disarming GPRS network communication. • IP communication: IE programming, remote upgrade, remote control, alarm networking. • Unique features: voice prompts, two-way intercom, on-site monitoring, regular arming and disarming</p> <p>•</p> <p>• Extended function: relay linkage, programmable output. • Wireless networking: FSK wireless networking. • Single bus: only the power line is needed for the wired defense area, and no additional signal line is required. • Battery configuration: 3.7V/2000MAh rechargeable battery (non-standard)</p> <p>HIFI function:</p> <p>• Audio format: WMA, APE, FLAC, AAC, DTS, MP3 • Audio source: AUX, Bluetooth, USB, SD, FM • Sound effect: 3D Liyin, HiFi scene, subwoofer, pure human voice • Frequency response range : 30Hz-16000Hz • Output power: 30W+30W</p>
	HIFI-ALARM-3200	WIFI+GPRS alarm controller			




	Polymer rechargeable battery pack	3.7V/2000mAh		1	Applicable to HIFI series host
	4G module	4G module		1	Suitable for FORTUNE-III/HIFI series mainframe
Super cost-effective video review alarm host					
	EAVS-2509A	4*1080 (WIFI)	PW-12V-3A	1	Video function: • Video access: 4*IPC1080P(WIFI) • Synchronous playback: 4*IPC1080P(WIFI) • Video access: 6*IPC1080P(POE) • Synchronous playback: 4*IPC1080P(POE) • Compression method: H.265 • Video output: HDMI, VGA, IVDEO output. • Transmission method: Support WIFI relay forwarding function. • System performance: preview/record/playback/backup/network monitoring. • Dual identification of moving image alarm and probe space intrusion alarm. • Support mobile APP video monitoring, as well as PTZ and home appliance control. • Support P2P/IE control/platform/Onvif protocol. • Support wifi connection (only for Mei'an WIFI cameras). • Support routing function (only the router 4G version supports).
	EAVS-2509B	6*1080 (POE)	PW-24V-4A	1	Alarm function: • System capacity: 32 single bus + 96 wireless devices (including intelligent electrical control) • Defense mode: overall arming and disarming, 8 divisions arming and disarming, independent arming and disarming. • GSM communication: SMS arm and disarm, GPRS network communication. • 4G communication: support video upload, 4G network two-way communication, network remote operation control (only 4G version supports this function). • IP communication: IE programming, remote upgrade, remote control, alarm networking. • Unique features: voice prompts, two-way intercom, on-site monitoring, regular arming and disarming • • Extended function: relay linkage, programmable output. • Wireless networking: FSK wireless networking.




	FORTUNE-III A	4*1080 (WIFI)	PW-12V-3A	1	<p>Video features:</p> <p>ÿ Video access: 4*IPC1080P(WIFI)</p> <p>ÿ Synchronous playback: 4*IPC1080P(WIFI)</p> <p>ÿ Video access: 9*IPC1080P(NVR)</p> <p>ÿ Synchronous playback: 4*IPC1080P(NVR)</p> <p>ÿ Compression method: H.265</p> <p>ÿ Video output: HDMI, VGA, IVDEO output.</p> <p>ÿ Transmission method: Support WIFI relay forwarding function.</p> <p>ÿ System performance: preview/record/playback/backup/network monitoring.</p> <p>ÿ Dual identification of moving image alarm and probe space intrusion alarm.</p> <p>ÿ Support mobile APP video monitoring, as well as PTZ and home appliance control.</p> <p>ÿ Support P2P/IE control/platform/Onvif protocol.</p>
	FORTUNE-III B	9*1080 (NVR)	PW-12V-3A	1	<p>ÿ Support wifi connection (only for Mei'an WIFI cameras).</p> <p>ÿ Support routing function (only the router 4G version supports).</p> <p>Alarm function:</p> <p>ÿ System capacity: 32 single bus + 96 wireless devices (including intelligent electrical control)</p> <p>ÿ Fortification method: overall arming and disarming, 8 divisions arming and disarming, independent arming and disarming.</p> <p>ÿ GSM communication: SMS arm and disarm, GPRS network communication.</p> <p>ÿ 4G communication: support video upload, 4G network two-way communication, network remote operation</p> <p>Control (Only 4G version supports this function).</p> <p>ÿ IP communication: IE programming, remote upgrade, remote control, alarm networking.</p> <p>ÿ Unique features: voice prompts, two-way intercom, on-site monitoring, regular arming and disarming</p> <p>.</p> <p>ÿ Extended function: relay linkage, programmable output.</p> <p>ÿ Wireless networking: FSK wireless networking.</p>
	Rechargeable battery pack 7.4V/2000mAh			1	For FORTUNE-III series mainframe
	2G module	2G module		1	For FORTUNE-III series mainframe
	4G module	4G module		1	Suitable for FORTUNE-III/HIFI series mainframe



	FORTUNE-III S	4ch NVR GPRS alarm control	PW-12V-2A Adapter	1	<p>FORTUNE-IPLUS is a new concept video review alarm host, which uses SD card to record video. Although it is small in size, it has more than 95% of the functions of large EAVS. It is a MINI_EAVS</p> <p>video function: ỹ Video access: LAN+WIFI ỹ Playback method: platform, APP computer playback ỹ System performance: preview/record/playback/backup /Network Monitoring. ỹ Dual identification of moving image alarm and probe space intrusion alarm. ỹ Support mobile APP video monitoring, as well as PTZ and home appliance control. ỹ Support P2P/IE control/platform/Onvif protocol. ỹ Support wifi cascade (only for Mei'an WIFI cameras). Alarm function: ỹ System capacity: 32 single bus + 96 wireless devices (including smart home) ỹ Defense mode: overall arming and disarming, 8 divisions arming and disarming, independent arming and disarming. ỹ GSM communication: SMS arm and disarm, GPRS network communication. ỹ 4G communication: 4G network two-way communication, network remote operation control. ỹ IP communication: IE programming, remote upgrade, remote control, alarm networking. ỹ Unique features: voice prompts, two-way intercom, on-site monitoring, regular arming and disarming</p> <p>.</p> <p>ỹ Extended function: relay linkage, programmable output. ỹ Wireless networking: FSK wireless networking. ỹ Built-in battery: 3.7V 3000MAh rechargeable battery (4G) 3.7V 1000MAh rechargeable battery (2G)</p>
		4ch NVR 4G Alarm Control			
	Polymer rechargeable battery pack	3.7V/3000mAh		1	Suitable for HIFI/FORTUNE-III S series host
	FORTUNE-IA	FORTUNE-I + HA-8501 Dome Camera (1080P)			<p>FORTUNE-I is a full-featured GPRS (optional 4G) alarm host. At the same time, FORTUNE-I can realize video review alarm and TCP/IP+GPRS dual network alarm with the help of the special camera of the United States. It can also realize multi-screen monitoring and multi-channel video alarm review and alarm functions through the back-end connection of the platform: ỹ System capacity: 4-channel wired + 32 wireless defense zones. ỹFortification method: overall arming and disarming, 4 divisions arming and disarming, independent arming and disarming. ỹ GSM communication: four voice calls, SMS arming and disarming GPRS network communication. ỹ IP communication: IE programming, remote upgrade, remote control, alarm networking. ỹ Unique features: voice prompts, two-way intercom, on-site monitoring, regular arming and disarming</p> <p>.</p> <p>ỹ Wireless networking: FSK wireless networking. ỹ Either one of the two cameras (only for the US security agreement) can be used together. Video function: ỹ Compression method: support H.264, H.265 ỹ Storage method: ỹ128GSD card, cloud storage.</p>


	FORTUNE-IB	FORTUNE-I + HA-8203 shaking head machine (1080P)			Unique features: voice prompts, two-way intercom, on-site monitoring, regular arming and disarming . ÿ Wireless networking: FSK wireless networking. ÿ Either one of the two cameras (only for the US security agreement) can be used together. Video function: ÿ Compression method: support H.264, H.265 ÿ Storage method: ÿ128GSD card, cloud storage. ÿ Network interface: 10Mbps/100Mbps auto-adaptive/RJ45 interface; ÿ Network protocol: TCP/IP, HTTP, etc.; ÿ Support IP address: static IP address, dynamic IP address; ÿ Online users: support 4. Users watch at the same time; ÿIntelligent analysis: Sensitivity motion detection can be set; ÿVoice intercom: two-way voice intercom, remote monitoring. ÿ Built-in gimbal, horizontal 350 degrees, vertical 90 degrees, 32 preset points. ÿ System configuration: windows/ios/android. ÿ Night vision effect: high-power LED lights, night vision 15 meters, IR-CUT automatic switching. ÿ Alarm notification: FTP uploading pictures and videos, SMS alarm and other notification methods ÿ Support P2P/IE control/platform/Onvif protocol. ÿ Support APP remote operation. ÿ Support wifi (optional), support audio configuration. ÿ PS2 interface, 5~12V power supply.
	FORTUNE-IC	FORTUNE-I + HA-8304 Panoramic Camera (1080P)			
Super cost-effective video review and alarm all-in-one machine					
	HA-8303	1400*1400 pixels 360 degree PIR	PW-12V-1A Adapter	1	Video function: ÿ Processor chip: HI3518EV200+H65 ÿ Compression method: H.265 ÿ Storage method: ÿ128GTF card, cloud storage. ÿ Network protocol: TCP/IP, DHCP. ÿ Network connection: 2.4G supports wifi. ÿIntelligent analysis: motion detection. ÿ Visible range: 360 degree panorama. ÿ Day and night mode: Dual filters automatically switch IR-CUT day and night. ÿ Voice intercom: two-way voice intercom, remote monitoring. ÿ Support mobile APP video monitoring, and remote control. ÿ Support P2P/IE control/platform/Onvif protocol. Alarm function: ÿ System capacity: 32 wireless zones. ÿ Network communication: GPRS TCP/IP dual network in one. ÿ IP communication: IE programming; remote upgrade; remote control, alarm networking. ÿ Remote control programming: GPRS TCP/ IP two-way data transmission and remote control programming. ÿ Unique features: voice prompts, online and offline reports. ÿ Extended functions: environmental monitoring, smart home, alarm linkage. ÿ Wireless networking: FSK wireless networking. ÿ Shell material: plastic shell, suitable for indoor use. ÿ DC12V 2A power supply.






Machine Translated by Google






	HA-8304	1400*1400 pixels with 2 external defense zones	PW-12V-1A Adapter	1	<p>function: ÿ System capacity: 32 wireless zones. ÿ Network communication: GPRS TCP/IP dual network in one. ÿ IP communication: IE programming; remote upgrade; remote control, alarm networking. ÿ Remote control programming: GPRS TCP/IP two-way data transmission and remote control programming. ÿ Unique features: voice prompts, online and offline reports. ÿ Extended functions: environmental monitoring, smart home, alarm linkage. ÿ Wireless networking: FSK wireless networking. ÿ Shell material: plastic shell, suitable for indoor use. ÿ DC12V 2A power supply. ÿ Built-in battery: 3.7V 18650 2000MHA rechargeable battery. ÿ Standard power supply: DC12V 2A ÿ Size: 120*120*30MM</p>
	HA-8204	2 million pixels	PW-5V-2A Adapter	1	<p>Video features:</p> <p>ÿ Compression method: H.265</p> <p>ÿ Storage method: ÿ128GTF card, cloud storage. ÿ Network protocol: TCP/IP, DHCP, etc. ÿ Network connection: 2.4G supports wifi. ÿIntelligent analysis: motion detection. ÿ Day and night mode: Dual filters automatically switch IR-CUT day and night. ÿ Voice intercom: two-way voice intercom, remote monitoring. ÿ Built-in gimbal, horizontal 350 degrees (HA-8204), horizontal 150 degrees (HA-8205), vertical 90 degrees (HA-8204), vertical 15 degrees (HA-8205), and 32 preset points. ÿ Support mobile APP video monitoring, and remote control. ÿ Support P2P/IE control/platform/Onvif protocol. Alarm features: ÿ System capacity: 32 wireless zones. ÿ Network communication: GPRS TCP/IP dual network in one. ÿ IP communication: IE programming; remote upgrade; remote control, alarm networking. ÿ Remote control programming: GPRS TCP/IP two-way data transmission and remote control programming. ÿ Unique features: voice prompts, online and offline reports. ÿ Extended functions: environmental monitoring, smart home, alarm linkage. ÿ Wireless networking: FSK wireless networking. ÿ Shell material: plastic shell, suitable for indoor use. ÿ Android USB interface, DC5V 2A power supply. ÿ Built-in battery: 3.7V 1000MHA rechargeable battery (HA-8204).</p>
	HA-8205	2 million pixels			<p>3.7V 1800MHA rechargeable battery (HA-8205). ÿ Standard power supply: DC5V 2A</p>
Industrial grade video review alarm host					



	EAVS-2506A	9-way NVR	PB-453R(FSK) Remote Control	1	<p>EAVS-2506 is a cost-effective video review alarm host developed by alarm operation, which integrates NVR POE alarm. Video features: ̣ Video access: 4*IPC5 million/9*IPC1080P (6POE) ̣ Synchronous playback: 4*1080P ̣ Video output: HDMI, VGA. ̣ Compression method: H.265 ̣ System performance: preview/record/playback/backup/network monitoring. ̣ Dual identification of moving image alarm and probe space intrusion alarm. ̣ Support mobile APP video monitoring, as well as PTZ and home appliance control. ̣ Support P2P/IE control/platform/Onvif protocol. ̣ Two independent network ports, support two independent network IP communication (data can be concurrently sent to two platforms at the same time). Alarm features: ̣ System capacity: 4 wired + 32 single-bus defense zones + 96 wireless devices (including intelligent electrical control) ̣ Defense mode: overall arming and disarming, 8 divisions arming and disarming, independent arming and disarming. ̣ GSM communication: four voice calls, SMS arming and disarming GPRS network communication. ̣ IP communication: IE programming, remote upgrade, remote control, alarm networking. ̣ 4G communication: support video upload, 4G network two-way communication, network remote operation control (only 4G version supports this function). ̣ Unique features: voice prompts, two-way intercom, on-site monitoring, regular arming and disarming</p> <p>̣ Extended function: relay linkage, programmable output. ̣ Wireless networking: FSK wireless networking. ̣ Power supply method: POE remote power supply.</p>
			PW-12V-3A power supply	1	
	EAVS-2506B	6-way POE	PB-453R(FSK) Remote Control	1	
			PW-24V-4A power supply	1	
	EAVS-2506C	IPC AHD TVi CVI CVBS (5 in 1)	PB-453R(FSK) Remote Control	1	
			PW-12V-3A power supply	1	
	EAVS-2506 dedicated 2G module	2506-2G		1	EAVS-2506 series dedicated 2G module
	EAVS-2506 dedicated 4G module	2506-4G		1	EAVS-2506 series dedicated 4G module


	EAVS-2504Plus	9*1080NVR TCP/IP+GPRS	PB-453R remote control	1	<p>Video features:</p> <p>• Video access: 9*IPC1080P • Synchronous playback: 4*IPC1080P • Compression method: H.265 • System performance:</p> <p>preview/record/playback/backup/network monitoring. • Dual identification of moving image alarm and probe space intrusion alarm. • Support mobile APP video monitoring, as well as PTZ and home appliance control. • Support P2P/IE control/platform/Onvif protocol. Alarm features: • System capacity: 8 wired + 32 wireless + 64 bus zone + 16 electrical control. •Fortification method: overall arming and disarming, 8 divisions arming and disarming, independent arming and disarming. • Telephone communication: 2 alarm centers, 4 voices, 2 free arming and disarming. • GSM communication: four voice calls, SMS arming and disarming GPRS network communication. • IP communication: IE programming, remote upgrade, remote control, alarm networking. • 4G communication: support video upload, 4G network two-way communication, network remote operation control (only 4G version supports this function). • Unique features: voice prompts, two-way intercom, on-site monitoring, regular arming and disarming</p> <p>.</p> <p>• Extended function: relay linkage, programmable output. • Wireless networking: ASK wireless networking.</p>
	EAVS-2504Plus		9*1080NVR TCP/IP+4G	PW-12V-3A power supply	
		PB-453R Remote Control		1	
		PW-12V-3A power supply		1	
Industrial grade video review alarm host					
	EAVS-2504G	9*1080NVR TCP/IP+4G	PB-453R(FSK) Remote Control	1	<p>Video features:</p> <p>• Video access: 9*IPC1080P • Synchronous playback: 4*IPC1080P • Compression method: H.265 • System performance:</p> <p>preview/record/playback/backup/network monitoring. • Dual identification of moving image alarm and probe space intrusion alarm. • Support mobile APP video monitoring, as well as PTZ and home appliance control. • Support P2P/IE control/platform/Onvif protocol. Alarm features: • System capacity: 8 wired + 32 wireless + 64 bus zone + 16 electrical control. •Fortification method: overall arming and disarming, 8 divisions arming and disarming, independent arming and disarming. • Telephone communication: 2 alarm centers, 4 voices, 2 free arming and disarming. • GSM communication: four voice calls, SMS arming and disarming GPRS network communication. • IP communication: IE programming, remote upgrade, remote control, alarm networking. • 4G communication: support video upload, 4G network two-way communication, network remote operation control (only 4G version supports this function). • Unique features: voice prompts, two-way intercom, on-site monitoring, regular arming and disarming</p> <p>.</p> <p>• Extended function: relay linkage, programmable output. • Networking: ASK networking.</p>
	EAVS-2504G		9*1080NVR	DC12V-3A(B) power supply	
		PB-453R(FSK) Remote Control		1	






	EAVS-2504G	9*1080NVR TCP/IP+4G	DC12V-3A(B) power supply	1	Control (Only 4G version supports this function). Unique features: voice prompts, two-way intercom, on-site monitoring, regular arming and disarming. Extended function: relay linkage, programmable output. Wireless networking: ASK wireless networking.
Dual independent IP industrial video review alarm host					
	EAVS-2504A	9*1080P PSTN+TCP/IP single network port	PB-453R Remote Control	1	Video features: Video access: 9*IPC1080P(8POE) Synchronous playback: 4*IPC1080P Video output: HDMI, VGA. Compression method: H.265 System performance: preview/record/playback/backup/network monitoring. Dual identification of moving image alarm and probe space intrusion alarm. Support mobile APP video monitoring, as well as PTZ and home appliance control. Support P2P/IE control/platform/Onvif protocol. Two independent network ports, support two independent network IP communication (data can be concurrently sent to two platforms at the same time). Alarm features: System capacity: 8 wired + 32 wireless + 64 bus zone + 16 electrical control. Fortification method: overall arming and disarming, 8 divisions arming and disarming, independent arming and disarming. Telephone communication: 2 alarm centers, 4 voices, 2 free arming and disarming. GSM communication: four voice calls, SMS arming and disarming GPRS network communication. IP communication: IE programming, remote upgrade, remote control, alarm networking. 4G communication: support video upload, 4G network two-way communication, network remote operation control (only 4G version supports this function). Unique features: voice prompts, two-way intercom, on-site monitoring, regular arming and disarming. Extended function: relay linkage, programmable output. Wireless networking: ASK wireless networking. Power supply mode: POE remote power supply.
			PW-12V-3A power supply	1	
	EAVS-2504B	9*1080P PSTN+TCP/IP dual independent IP output network ports	PB-453R Remote Control	1	
			PW-12V-3A power supply	1	
	EAVS-2504C	9*1080POE PSTN+TCP/IP single network port	PB-453R remote control	1	
			PW-48V-3A(B) power supply	1	
	EAVS-2504D	9*1080POE PSTN+TCP/IP dual independent IP output network ports	PB-453R Remote Control	1	
			PW-48V-3A(B) power supply	1	
	EAVS-2504E	IPC AHD TVI CVI CVBS (5 in 1)	PB-453R Remote Control	1	
			PW-48V-3A(B) power supply	1	






	EAVS public 2G module		EAVS-2G	1		
	EAVS shares 4G module		EAVS-4G	1		Applicable to EAVS series mainframe
	EAVS dedicated keyboard		EAVS-4G	1		
Industrial grade access control attendance video review alarm host						
	EAVS-3300A	9*1080NVR Double door access control single network port	PB-403R Remote Control	1	Video features: • Video access: 9*IPC1080P(8POE) • Synchronous playback: 4*IPC1080P • Video output: HDMI, VGA. • Compression method: H.265 • System performance: preview/record/playback/backup/network monitoring. • Dual identification of moving image alarm and probe space intrusion alarm. • Support mobile APP video monitoring, as well as PTZ and home appliance control. • Support P2P/IE control/platform/Onvif protocol. • Two independent network ports, support two independent network IP communication (data can be concurrently sent to two platforms at the same time). Alarm features: • System capacity: 8 wired + 32 wireless + 64 bus zone + 16 electrical control. • Fortification method: overall arming and disarming, 8 divisions arming and disarming, independent arming and disarming. • Telephone communication: 2 alarm centers, 4 voices, 2 free arming and disarming. • GSM communication: four voice calls, SMS arming and disarming GPRS network communication. • IP communication: IE programming, remote upgrade, remote control, alarm networking. • 4G communication: support video upload, 4G network two-way communication, network remote operation control (only 4G version supports this function). • Unique features: voice prompts, two-way intercom, on-site monitoring, regular arming and disarming	
			PW-48V-3A(B) power supply	1		
	EAVS-3300B 8-way POE double door	9*1080POE double door access control single network port	PB-403R Remote Control	1		
			PW-48V-3A(B) power supply	1		
	EAVS-3400A 16*1080 Double door	16*1080NVR double door access control single network port	PB-403R Remote Control	1		

	16*1080 double door	16*1080NVR double door access control single network port	PW-48V-3A(B) power supply	1	ÿ IP communication: IE programming, remote upgrade, remote control, alarm networking. ÿ 4G communication: support video upload, 4G network two-way communication, network remote operation control (only 4G version supports this function) . ÿ Unique features: voice prompts, two-way intercom, on-site monitoring, regular arming and disarming . ÿ Extended function: relay linkage, programmable output. ÿ Wireless networking: FSK wireless networking. ÿ Power supply mode: POE remote power supply. Access Control Features:
	EAVS-3300B 8- way POE double door	9*1080POE double door access control single network port	PB-403R Remote Control PW-48V-3A(B) power supply	1 1	
	EAVS dedicated 2G module		EAVS-2G	1	Suitable for EAVS series mainframes
	EAVS dedicated 4G module		EAVS-4G	1	
	EAVS special fingerprint password door machine	fingerprint		1	500 corresponding fingerprints
	EAVS dedicated fingerprint password face recognition door machine	Fingerprint face recognition		1	On-site comparison, 500 faces, 500 corresponding fingerprints
One-click emergency video review alarm host (DVR/NVR as TCP/IP main communication GPRS as backup communication)					
	EAVS-2504F TCP/IP+GPRS stand-alone (3520D-V400)	8*1080PNVR	PB-403R Remote Control	1	Video features: ÿ Video access: 8*IPC1080P ÿ Synchronous playback: 4*IPC1080P ÿ Compression method: H.265 ÿ System performance: preview/record/playback/backup/network monitoring. ÿ Dual identification of moving image alarm and probe space intrusion alarm. ÿ Support mobile APP video monitoring, as well as PTZ and home appliance control. ÿ Support P2P/IE control/platform/Onvif protocol. Alarm features: ÿ System capacity: 4 wired + 32 wireless + 64 bus zone + 16 electrical control. ÿFortification method: overall arming and disarming, 8 divisions arming and disarming, independent arming and disarming.

	TCP/IP+GPRS stand-alone (3520D-V400)	8*1080PNVR	PW-12V-5A power supply	1	Alarm features: • System capacity: 4 wired + 32 wireless + 64 bus zone + 16 electrical control. • Fortification method: overall arming and disarming, 8 divisions arming and disarming, independent arming and disarming. • Telephone communication: 2 alarm centers, 4 voices, 2 free arming and disarming. • GSM communication: four voice calls, SMS arming and disarming GPRS network communication. • IP communication: IE programming, remote upgrade, remote control, alarm networking. • Alarm mode: fire alarm, emergency help, emergency call one-button alarm. • Unique features: voice prompts, two-way intercom, on-site monitoring, regular arming and disarming, and direct connection to the campus broadcasting system. • Extended function: relay linkage, programmable output. • Wireless networking: FSK wireless networking.
Desktop video review alarm host (DVR/NVR as TCP/IP main communication GPRS as backup communication)					
	EAVS-2300	9-way NVR	PB-403R Remote Control	1	Video features: • Video access: 9*IPC2 million/4*IPC5 million • Synchronous playback: 4*IPC1080P/1*IPC5 million • Video output: HDMI, VGA. • Compression method: H.265 • System performance: preview/record/playback/backup/network monitoring. • Dual identification of moving image alarm and probe space intrusion alarm. • Support mobile APP video monitoring, as well as PTZ and home appliance control. • Support P2P/IE control/platform/Onvif protocol. • Two independent network ports, support two independent network IP communication (data can be concurrently sent to two platforms at the same time). Alarm features: • System capacity: 8 wired + 32 wireless + 64 bus zone + 16 electrical control. • Fortification method: overall arming and disarming, 8 divisions arming and disarming, independent arming and disarming. • GSM communication: four voice calls, SMS arming and disarming GPRS network communication. • IP communication: IE programming, remote upgrade, remote control, alarm networking. • 4G communication: support video upload, 4G network two-way communication, network remote operation control (only 4G version supports this function). • Unique features: voice prompts, two-way intercom, on-site monitoring, regular arming and disarming. • • Extended function: relay linkage, programmable output. • Wireless networking: FSK wireless networking. • Power supply method: POE remote power supply.
			PW-12V-2A power supply	1	
	EAVS-2300A	9-way POE	PB-403R Remote Control	1	
			PW-48V-5A power supply	1	

	EAVS-2516A	32ch NVR	PB-403R remote control	1	<p>Video features:</p> <p>• Video access: 16*IPC2 million/8*IPC5 million • Synchronous playback: 4*IPC1080P/2*IPC5 million • Video output: HDMI, VGA. • Compression method: H.265 • System performance: preview/record/playback/backup/network monitoring. • Dual identification of moving image alarm and probe space intrusion alarm. • Support mobile APP video monitoring, as well as PTZ and home appliance control. • Support P2P/IE control/platform/Onvif protocol. • Two independent network ports, support two independent network IP communication (data can be concurrently sent to two platforms at the same time). Alarm features: • System capacity: 8 wired + 32 wireless + 64 bus zone + 16 electrical control. • Fortification method: overall arming and disarming, 8 divisions arming and disarming, independent arming and disarming. • GSM communication: four voice calls, SMS arming and disarming GPRS network communication. • IP communication: IE programming, remote upgrade, remote control, alarm networking. • 4G communication: support video upload, 4G network two-way communication, network remote operation control (only 4G version supports this function). • Unique features: voice prompts, two-way intercom, on-site monitoring, regular arming and disarming</p> <p>. • Extended function: relay linkage, programmable output. • Wireless networking: FSK wireless networking. • Power supply method: POE remote power supply.</p>
			PW-12V-3A power supply	1	
	EAVS-2516B	16-way POE	PB-403R Remote Control	1	
			PW-48V-5A power supply	1	
	EAVS-2616A	32-way NNR	PB-403R Remote Control	1	<p>Video features:</p> <p>• Video access: 32*IPC2 million/8*IPC5 million • Synchronous playback: 4*IPC1080P/2*IPC5 million • Video output: HDMI, VGA. • Compression method: H.265 • System performance: preview/record/playback/backup/network monitoring. • Dual identification of moving image alarm and probe space intrusion alarm. • Support mobile APP video monitoring, as well as PTZ and home appliance control. • Support P2P/IE control/platform/Onvif protocol. • Two independent network ports, support two independent network IP communication (data can be concurrently sent to two platforms at the same time). Alarm features: • System capacity: 8 wired + 32 wireless + 64 bus zone + 16 electrical control. • Fortification method: overall arming and disarming, 8 divisions arming and disarming, independent arming and disarming. • GSM communication: four voice calls, SMS arming and disarming GPRS network communication. • IP communication: IE programming, remote upgrade, remote control, alarm networking. • 4G communication: support video upload, 4G network two-way communication, network remote operation control (only 4G version supports this function). • Unique features: voice prompts, two-way intercom, on-site monitoring, regular arming and disarming</p> <p>. • Extended function: relay linkage, programmable output. • Wireless networking: FSK wireless networking.</p>
			PW-12V-4A power supply	1	
	EAVS-2616B	16-way POE	PB-403R Remote Control	1	




	EAVS-2616B	16-way POE	PW-48V-5A power supply	1	operation control (only 4G version supports this function). • Unique features: voice prompts, two-way intercom, on-site monitoring, regular arming and disarming • • Extended function: relay linkage, programmable output. • Wireless networking: FSK wireless networking. • Power supply method: POE remote power supply.
	EAVS dedicated 2G module		EAVS-2G	1	Suitable for EAVS series mainframes
	EAVS dedicated 4G module		EAVS-4G	1	
With warning sign					
	MD-366 (Small)		Wired warning sign	• Specially designed for alarm networking 220V MD-365 220V MD-364 220V MD-365R 12VDC/300mA MD-364R 12VDC/300mA	
	MD-365 (Medium)		Wired warning sign		
	MD-365R (Medium)		wireless warning sign		
	MD-367R (Large)		Wired warning sign		

	MD-367R (Large)		wireless warning sign	
E-AVS control keyboard				
	EAVS-K Chinese keyboard		Control Keyboard	ÿ Chinese display ÿ Realize display of E-AVS status ÿ Real-time operation of E-AVS
Zone Expansion Module				
	FC-7601 Single Zone		address module	ÿ Suitable for FC7564/FC7664/7668/E-AVS ÿ RS-485 mode ÿ With tamper signal acquisition
E-AVS dedicated intercom speaker				
	MD-339R		intercom speaker	ÿ Specially designed for alarm networking ÿ 340—3400HZ voice filter ÿ Ringing
Dedicated UPS power supply and battery				
	PD-12V-3A		UPS power supply	ÿ Special UPS power supply for monitoring ÿ Anti-surge protection output power socket ÿ Accurately and reliably handle power conditions such as power failure, short circuit, overload, high and low voltage, and surge, providing comprehensive protection for the load. ÿ Rated capacity: 800VA

NVR dedicated power adapter










	PW-12V-3A		DC12V/3A power supply	<p>ÿ 12V/3A power supply</p> <p>ÿ Adapt to FORTUNE-III (NVR/WIFI/5-in-1 version) video alarm host</p>
	PW-12V-3A(B)		DC48V/3A power supply	<p>ÿ 12V/3A power supply</p> <p>ÿ Adapt to EAVS (H.265 version) wall-mounted video alarm video host</p>
	PW-12V-5A		AC12V/5A power supply	<p>ÿ 12V/5A power supply</p> <p>ÿ Compatible with EAVS 4/8-channel wall-mounted video alarm video host</p>
	PW-15V-3A		DC15V/5A power supply	<p>ÿ 15V/5A power supply</p> <p>ÿ Adapt to EAVS 8-channel desktop video alarm video host</p>
	PW-24V-4A		DC24V/4A power supply	<p>ÿ 24V/4A POE power supply</p> <p>ÿ Adapt to EAVS-2506B (POE version) video alarm video host</p>
	PW-48V-3A		DC48V/3A power supply	<p>ÿ 48V/3A POE power supply</p> <p>ÿ Adapt to FORTUNE-III (POE version) video alarm video host</p>





	PW-48V-3A(B)		DC12V/3A power supply	ÿ 48V/3A power supply ÿ Adapt to EAVS (POE version) wall-mounted video alarm video host
	PW-48V-5A		DC48V/5A power supply	ÿ 48V/3A power supply ÿ Adapt to EAVS 16-channel (POE version) video alarm video host
	PW-12V-10A		DC12V/10A power supply	ÿ 12V/10A power supply ÿ Adapt to EAVS 16-channel video alarm video host






Shop online at <https://www.vedardalarm.com>

POE EAVS series set				
	EAVS-2509B-SUIT 6 POE (A suit)	Choose either HA-8406P or HA-8405P	24V POE (1080)	<p>Video features:</p> <ul style="list-style-type: none"> • Video access: 6*IPC1080P(POE) • • Synchronous playback: 4*IPC1080P(POE) • • Compression method: H.265 • • Video output: HDMI, VGA, IVDEO output. • • Transmission method: Support WIFI relay forwarding function. • • System performance: preview/record/playback/backup/network monitoring. • • Dual identification of moving image alarm and probe space intrusion alarm. • • Support mobile APP video monitoring, as well as PTZ and home appliance control. • • Support P2P/IE control/platform/Onvif protocol. • • Support wifi connection (only for Mei'an WIFI cameras). • • Support routing function (only the router 4G version supports). Alarm features: • • System capacity: 4 wired + 32 single bus + 96 wireless devices; • (including intelligent road electrical control). • Fortification method: overall arming and disarming, 8 divisions arming and disarming, independent arming and disarming. • • GSM communication: four voice calls, SMS arming and disarming GPRS network communication. • • IP communication: IE programming, remote upgrade, remote control, alarm networking. • • 4G communication: support video upload, 4G network two-way communication, network remote operation control (only 4G version supports this function). • • Unique features: voice prompts, two-way intercom, on-site monitoring, regular arming and disarming. • • Extended function: relay linkage, programmable output. • • Wireless networking: FSK wireless networking. • • Power supply method: POE remote power supply.
		MB-435DMT single bus infrared detector		
		PB-453R (FSK) Wireless Remote Control		
		PW-24-4A	Host power adapter	
	EAVS-2506B-SUIT 6 POE (A suit)	Choose either HA-8406P or HA-8405P	24V POE (1080)	
		MC-575R (FSK) Wireless Infrared Detector		
		MD-211R (FSK)	Wireless door sensor	
		PB-453R (FSK) Wireless Remote Control		
		PW-24-4A	Host power adapter	
	EAVS-2506B-SUIT 6 POE (B suit)	HA-8501P	24V POE (1080)	
		MB-435DMT single bus infrared detector		
		PB-453R (FSK) Wireless Remote Control		

		PW-24-4A	Host power adapter	
	EAVS dedicated 2G module	2506-2G		Suitable for EAVS-2506 series mainframe
	EAVS dedicated 4G module	2506-4G		Suitable for EAVS-2506 series mainframe
	2G module	2G module		For FORTUNE-III series mainframe
	4G mode fast	4G mode fast		For FORTUNE-III series mainframe
	rechargeable battery pack	7.4V/2000mAh		For FORTUNE-III series mainframe
Remarks: 1 wireless detector MC-575R (FSK) + 1 wireless door sensor MD-211R (FSK) in the POE series set can replace 2 single bus infrared detector MB-435DMT at the same value.				
WIFI FOUTUNE series set				
		HA-8406 Or choose one of HA-8405	WIFI (1080)	

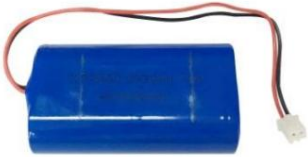	FORTUNE-III-A-SUIT WIFI set	MC-575R (FSK) Wireless	Infrared Detector	<p>Video function:</p> <p>• Video access: 4*IPC1080P •</p> <p>Synchronous playback: 4*IPC1080P •</p> <p>Compression method: H.265 • Video</p> <p>output: HDMI, VGA, IVDEO output. • Transmission method:</p> <p>Support WIFI relay forwarding function. • System performance:</p> <p>preview/record/playback/backup/network monitoring. • Dual identification of</p> <p>moving image alarm and probe space intrusion alarm. • Support mobile APP</p> <p>video monitoring, as well as PTZ and home appliance control. • Support</p> <p>P2P/IE control/platform/Onvif protocol. • Support wifi connection (only for</p> <p>Mei'an WIFI cameras). • Support routing function (only the router 4G version</p> <p>supports). Alarm function: • System capacity: 32 single bus + 96 wireless</p> <p>devices (including intelligent electrical control) • Defense mode: overall</p> <p>arming and disarming, 8 divisions arming and disarming, independent arming and disarming.</p> <p>• GSM communication: SMS arm and disarm, GPRS network communication. • 4G</p> <p>communication: support video upload, 4G network two-way communication, network remote</p> <p>operation control (only 4G version supports this function). • IP communication: IE programming,</p> <p>remote upgrade, remote control, alarm networking. • Unique features: voice prompts, two-way</p> <p>intercom, on-site monitoring, regular arming and disarming. • Extended function: relay linkage,</p> <p>programmable output. • Wireless networking: FSK wireless networking.</p>
		MD-211R (FSK)	Wireless door sensor	
		PB-453R (FSK) Wireless	Remote Control	
		PW-12-3A	Host power adapter	
	EAVS-2509A-SUIT WIFI set	Choose either HA-8406 or HA-8405	WIFI (1080)	
		MC-575R (FSK) Wireless	Infrared Detector	
		MD-211R (FSK)	Wireless door sensor	
		PB-453R (FSK) Wireless	Remote Control	
	HIFI-ALARM-3200 WIFI set	HA-8501	WIFI (1080)	<p>*****</p> <p>HIFI function:</p> <p>• Audio format: WMA, APE, FLAC, AAC, DTS, MP3 • Audio</p> <p>source: AUX, Bluetooth, USB, SD, FM • Sound effect: 3D Liyin,</p> <p>HiFi scene, subwoofer, pure human voice • Frequency response range :</p> <p>30Hz-16000Hz • Output power: 30W+30W</p>
		MC-565R (FSK) Wireless	Infrared Detector	
		MD-211R (FSK)	Wireless door sensor	
		PB-453R (FSK) Wireless	Remote Control	
	rechargeable battery pack	PW-12-3A	Power Adapter	
				Suitable for HIFI series host
		7.4V/2000mAh		

	Polymer rechargeable battery pack	3.7V/2000mAh		For FORTUNE-III series mainframe
	2G module	2G module		Suitable for FORTUNE-III/HIFI series mainframe
	4G module	4G module		Suitable for FORTUNE-III/HIFI series mainframe



Shop online at <https://www.vedardalarm.com>



Multifunctional network 360° WIFI panoramic camera (American security protocol, can be directly connected to the platform)







HA-8304



Panoramic network camera 2 million



• Resolution: 2MP(1544*1544) •
Compression method: H.265 • Storage
method: 128GTF card, cloud storage. • Network
connection: 2.4G wifi or TCP/IP optional. • Network
protocol: TCP/IP, HTTP, etc. • Support IP address: static
IP address, dynamic IP address; • Intelligent analysis: with
humanoid recognition, with early warning function. • Voice
function: with voice prompt function, two-way voice intercom, remote monitoring. •
Visible range: 360 degree panorama. • Day and night mode: Dual filters automatically
switch IR-CUT day and night. • Support mobile APP video monitoring, and remote
control. • Alarm notification: FTP uploading pictures and videos, SMS alarm and other
notification methods (requires server cooperation) • Support P2P/IE control/platform/
Onvif protocol. • Online users: support 4 users to watch at the same time; • DC
interface, DC12V 1A power supply. • Shell: metal shell, suitable for indoor use. • Size:
70*H60mm





	HA-8302A	Panoramic network camera	2 million	<p> ̣ Resolution: 2MP(1544*1544) ̣ Compression method: H.265 ̣ Storage method: ̣128GTF card, cloud storage. ̣ Network connection: 2.4G wifi or TCP/IP optional. ̣ Network protocol: TCP/IP, HTTP, etc. ̣ Support IP address: static IP address, dynamic IP address; ̣ Intelligent analysis: with humanoid recognition, with early warning function. ̣ Voice function: with voice prompt function, two-way voice intercom, remote monitoring. ̣ Visible range: 360 degree panorama. ̣ Day and night mode: Dual filters automatically switch IR-CUT day and night. ̣ Support mobile APP video monitoring, and remote control. ̣ Alarm notification: FTP uploading pictures and videos, SMS alarm and other notification methods (requires server cooperation) ̣ Support P2P/IE control/platform/ Onvif protocol. ̣ Online users: support 4 users to watch at the same time; ̣ DC interface, DC12V 1A power supply. ̣ Shell: metal shell, suitable for indoor use. ̣ Size: 120*120*41mm </p>
Multifunctional network hemispheric WIFI camera (American security protocol, can be directly connected to the platform)				
	HA-8601	Web video camera	2 million	<p> ̣ Resolution: 2MP(1920*1080) ̣ Compression method: H.265 ̣ Storage method: ̣128GSD card, cloud storage. ̣ Network interface: 10Mbps/100Mbps adaptive/RJ45 interface; ̣ Network protocol: TCP/IP, HTTP, etc. ̣ Support IP address: static IP address, dynamic IP address; ̣ Intelligent analysis: with humanoid recognition, with early warning function. ̣ Voice function: with voice prompt function, two-way voice intercom, remote monitoring. ̣ Day and night mode: Dual filters automatically switch IR-CUT day and night. ̣ Support mobile APP video monitoring, and remote control. ̣ Alarm notification: FTP uploading pictures and videos, SMS alarm and other notification methods (requires server cooperation) ̣ Support P2P/IE control/platform/ Onvif protocol. ̣ Support wifi, support audio configuration. ̣ Android USB interface, DC5V 1A power supply. ̣ Shell: plastic shell, suitable for indoor use ̣ Size: ̣90*76mm </p>






	HA-8501	Multifunctional network infrared dome camera	2 million	<p> ̣ Resolution: 2MP(1920*1080) ̣ Compression method: H.265 ̣ Storage method: ̣128GSD card, cloud storage. ̣ Network interface: 10Mbps/100Mbps adaptive/RJ45 interface; ̣ Network protocol: TCP/IP, HTTP, etc. ̣ Support IP address: static IP address, dynamic IP address; ̣ Intelligent analysis: with humanoid recognition, with early warning function. ̣ Voice function: with voice prompt function, two-way voice intercom, remote monitoring. ̣ Day and night mode: Dual filters automatically switch IR-CUT day and night. ̣ Support mobile APP video monitoring, and remote control. ̣ Alarm notification: FTP uploading pictures and videos, SMS alarm and other notification methods (requires server cooperation) ̣ Support P2P/IE control/platform/Onvif protocol. ̣ Support wifi, support audio configuration. ̣ Android USB interface, DC5V 1A power supply. ̣ Shell: plastic shell, suitable for indoor use. ̣ Size: ̣85*66mm </p>
Multifunctional network ball machine WIFI camera (Meian protocol, can be directly connected to the platform)				
	HA-8206	Network infrared shaking head machine	2 million	<p> ̣ Resolution: 200W(1920*1080) ̣ Compression method: H.264 ̣ Storage method: ̣128GTF card, cloud storage. ̣ Network connection: 2.4G supports wifi. ̣ Online users: support 4 users to watch at the same time; ̣ Intelligent analysis: motion detection. ̣ Day and night mode: Dual filters automatically switch IR-CUT day and night. ̣ Voice intercom: two-way voice intercom, remote monitoring. ̣ Comes with a gimbal, 350 degrees horizontally and 90 degrees vertically. ̣ Support mobile APP video monitoring, and remote control. ̣ Alarm notification: FTP uploading pictures and videos, SMS alarm and other notification methods (requires server cooperation) ̣ Support P2P/IE control/platform/Onvif protocol. ̣ Support wifi, support audio configuration. ̣ Plastic shell, suitable for indoor use. ̣ Android USB interface, DC5V 1A power supply. </p>






	HA-8203	Network infrared shaking head	machine 2 million	<p> ̣ Resolution: 2MP(1920*1080) ̣ Compression method: H.265 ̣ Storage method: ̣128GSD card, cloud storage. ̣ Network interface: 10Mbps/100Mbps adaptive/ RJ45 interface; ̣ Network protocol: TCP/IP, HTTP, etc. ̣ Support IP address: static IP address, dynamic IP address; ̣ Intelligent analysis: with humanoid recognition, with early warning function. ̣ Voice function: with voice prompt function, two-way voice intercom, remote monitoring. ̣ Day and night mode: Dual filters automatically switch IR-CUT day and night. ̣ Built-in gimbal: horizontal 350 degrees, vertical 90 degrees, 32 preset points. ̣ Support mobile APP video monitoring, and remote control. ̣ Alarm notification: FTP uploading pictures and videos, SMS alarm and other notification methods (requires server cooperation) ̣ Support P2P/IE control/platform/Onvif protocol. ̣ Support wifi, support audio configuration. ̣ PS2 interface, DC5~12V 1A power supply. ̣ Shell: plastic shell, suitable for indoor use. ̣ Size: 115*80*142mm </p>
	HA-8204A	Network infrared shaking head	machine 2 million pixels	<p> ̣ Resolution: 2MP(1920*1080) ̣ Compression method: H.265 ̣ Storage method: ̣128GSD card, cloud storage. ̣ Network interface: 10Mbps/100Mbps adaptive/ RJ45 interface; ̣ Network protocol: TCP/IP, HTTP, etc. ̣ Support IP address: static IP address, dynamic IP address; ̣ Intelligent analysis: with humanoid recognition, with early warning function. ̣ Voice function: with voice prompt function, two-way voice intercom, remote monitoring. ̣ Day and night mode: Dual filters automatically switch IR-CUT day and night. ̣ Built-in gimbal: horizontal 350 degrees, vertical 90 degrees, 32 preset points. ̣ Support mobile APP video monitoring, and remote control. ̣ Alarm notification: FTP uploading pictures and videos, SMS alarm and other notification methods (requires server cooperation) ̣ Support P2P/IE control/platform/Onvif protocol. ̣ Support wifi, support audio configuration. ̣ Plastic shell, suitable for indoor use. ̣ PS2 interface, DC5~12V 1A power supply. ̣ Size: 111*98*160mm </p>






	HA-8205A	Network infrared shaking head	machine 2 million	<p> ̈ Resolution: 2MP(1920*1080) ̈ Compression method: H.265 ̈ Storage method: ̈128GSD card, cloud storage. ̈ Network interface: 10Mbps/100Mbps adaptive/RJ45 interface; ̈ Network protocol: TCP/IP, HTTP, etc. ̈ Support IP address: static IP address, dynamic IP address; ̈ Intelligent analysis: with humanoid recognition, with early warning function. ̈ Voice function: with voice prompt function, two-way voice intercom, remote monitoring. ̈ Day and night mode: Dual filters automatically switch IR-CUT day and night. ̈ Built-in gimbal: horizontal 150 degrees, vertical 15 degrees, 32 preset points. ̈ Support mobile APP video monitoring, and remote control. ̈ Alarm notification: FTP uploading pictures and videos, SMS alarm and other notification methods (requires server cooperation) ̈ Support P2P/IE control/platform/Onvif protocol. ̈ Support wifi, support audio configuration. ̈ PS2 interface, DC5~12V 1A power supply. ̈ Shell: plastic shell, suitable for indoor use. ̈ Size: ̈82.3*H160mm </p>
Multi-function network WIFI camera (American security protocol, can be directly connected to the platform)				
	HA-8403	Multifunctional network dual light dot matrix camera	2 million	<p> ̈ Resolution: 2MP(1920*1080) ̈ Compression method: H.265 ̈ Storage method: ̈128GSD card, cloud storage. ̈ Network interface: 10Mbps/100Mbps adaptive/RJ45 interface; ̈ Network protocol: TCP/IP, HTTP, etc. ̈ Support IP address: static IP address, dynamic IP address; ̈ Intelligent analysis: with humanoid recognition, with early warning function. ̈ Day and night mode: Dual filters automatically switch IR-CUT day and night. ̈ Support mobile APP video monitoring, and remote control. ̈ Alarm notification: FTP uploading pictures and videos, SMS alarm and other notification methods (requires server cooperation) ̈ Support P2P/IE control/platform/Onvif protocol. ̈ Support wifi, support audio configuration. ̈ Plastic shell, suitable for indoor use. ̈ DC interface, 12V 1A power supply. ̈ Shell: metal shell, waterproof grade IP65, suitable for indoor and outdoor. ̈ Size: 118*70*63mm </p>

	HA-8404	Multifunctional network infrared camera	2 million	<p> ̣ Resolution: 2MP(1920*1080) ̣ Compression method: H.265 ̣ Storage method: ̣128GSD card, cloud storage. ̣ Network interface: 10Mbps/100Mbps adaptive/RJ45 interface; ̣ Network protocol: TCP/IP, HTTP, etc. ̣ Support IP address: static IP address, dynamic IP address; ̣ Intelligent analysis: with humanoid recognition, with early warning function. ̣ Day and night mode: Dual filters automatically switch IR-CUT day and night. ̣ Support mobile APP video monitoring, and remote control. ̣ Alarm notification: FTP uploading pictures and videos, SMS alarm and other notification methods (requires server cooperation) ̣ Support P2P/IE control/platform/Onvif protocol. ̣ Support wifi, support audio configuration. ̣ Plastic shell, suitable for indoor use. ̣ DC interface, 12V 1A power supply. ̣ Shell: metal shell, waterproof grade IP65, suitable for indoor and outdoor. ̣ Size: 118*70*63mm </p>
	HA-8405	Multifunctional network+A29 camera	2 million	<p> ̣ Resolution: 2MP(1920*1080) ̣ Compression method: H.265 ̣ Storage method: ̣128GSD card, cloud storage. ̣ Network interface: 10Mbps/100Mbps adaptive/RJ45 interface; ̣ Network protocol: TCP/IP, HTTP, etc. ̣ Support IP address: static IP address, dynamic IP address; ̣ Intelligent analysis: with humanoid recognition, with early warning function. ̣ Voice function: support remote monitoring. ̣ Day and night mode: Dual filters automatically switch IR- CUT day and night. ̣ Support mobile APP video monitoring, and remote control. ̣ Alarm notification: FTP uploading pictures and videos, SMS alarm and other notification methods (requires server cooperation) ̣ Support P2P/IE control/platform/Onvif protocol. ̣ Support wifi, support audio configuration. ̣ Plastic shell, suitable for indoor use. ̣ DC interface, 12V 1A power supply. ̣ Shell: plastic shell, suitable for indoor use. ̣ Size: 112*86*132mm </p>

	HA-8406	Multifunctional network infrared camera	2 million	<p> Resolution: 2MP(1920*1080) Resolution Compression method: H.265 Storage method: 128GSD card, cloud storage. Network interface: 10Mbps/100Mbps adaptive/RJ45 interface; Network protocol: TCP/IP, HTTP, etc. Support IP address: static IP address, dynamic IP address; Intelligent analysis: with humanoid recognition, with early warning function. Voice function: support remote monitoring. Day and night mode: Dual filters automatically switch IR-CUT day and night. Support mobile APP video monitoring, and remote control. Alarm notification: FTP uploading pictures and videos, SMS alarm and other notification methods (requires server cooperation) Support P2P/IE control/ platform/Onvif protocol. Support wifi, support audio configuration. Plastic shell, suitable for indoor use. DC interface, 12V 1A power supply. Shell: metal + plastic, waterproof grade IP65, suitable for indoor and outdoor. Size: 72*127.5MM </p>
POE HD network camera (for EAVS/FORTUNE-III POE series video alarm host)				
	HA-8501P	POE 24V Multifunction IP Camera EAVS-2506B host dedicated	2 million	<p> Resolution: 200W(1920*1080) Resolution Compression method: H.265 Storage method: 128GTF card, cloud storage. Network interface: 10Mbps/ 100Mbps auto-adaptive/RJ45 interface; Network protocol: TCP/IP, HTTP, etc.; Support IP address: static IP address, dynamic IP address; Online users: support 4 users to watch at the same time; Intelligent Analysis: with humanoid recognition, with early warning function, can set the sensitivity of motion detection. Voice function: with voice prompt function. System configuration: windows/ios/android. Night vision effect: high-power LED lights, night vision 20 meters, IR-CUT automatic switching. Alarm notification: FTP uploading pictures and videos, SMS alarm and other notification methods (requires server cooperation) Support P2P/IE control/platform/Onvif protocol. DC12V/1A power supply. Support American Standard protocol PoE power supply (24V) Support international standard protocol PoE power supply (48V) Metal + plastic shell, waterproof grade IP65, can be used indoors and outdoors. Size: 85*66mm(HA-8501P) 72*127.5mm(HA-8406P) </p>
	HA-8406P	POE 24V Multifunction IP Camera EAVS-2506B host dedicated		
	HA-8405P-1	POE 24V Multifunction IP Camera EAVS-2506B host dedicated		

	HA-8405P-2	POE 48V Multifunctional IP Camera	ȳ Metal + plastic shell, waterproof grade IP65, can be used indoors and outdoors. ȳ Size: ȳ85*66mm(HA-8501P) ȳ72*127.5mm(HA-8406P) 112*86*132mm(HA-8405P)
48V POE HD network camera (for EAVS/FORTUNE-III POE series video alarm host)			
	MA-P204-200P-1	H.264	ȳ 2,000,000 modules ȳ 3PM 4/6/8mm large lens ȳ Dot matrix four-lamp crystal element 42MIL light board, aluminum plate 2.0 heat dissipation ȳ IR-CUT: full metal lens mount 1/3 ȳ With BNC, network cable, power interface Metal paint shell ȳ Waterproof grade: IP65 ȳ Size 185*80*70MM
	MA-P204-200P-2	H.265	
	MA-P204-200P-1	H.264	ȳ 2,000,000 modules ȳ 3PM 4/6/8mm large lens ȳ Dot matrix four-lamp crystal element 42MIL light board, aluminum plate 2.0 heat dissipation ȳ IR-CUT: full metal lens mount 1/3 ȳ With BNC, network cable, power interface Metal paint shell ȳ Waterproof grade: IP65 ȳ Size 185*80*70MM
	MA-P203-200P-2	H.265	
	MA-P202-200P-1	H.264	ȳ 2 million modules ȳ 3PM 3.6mm small lens ȳ 36 lightsȳ5 light panels 130*65*60MM
	MA-P202-200P-2	H.265	
	MA-P202-200P-1	H.264	ȳ 2 million modules ȳ 3PM 3.6mm small lens ȳ 36 lightsȳ5 light boards



	MA-P202-200P-2	H.265	̣ IR-CUT: All-metal lens mount 1/3 ̣ With BNC, network cable, power interface ̣ All-metal paint shell ̣ Waterproof grade: IP65 ̣ Size 130*65*60MM
HD IP Camera (for EAVS series video alarm)			
	MA-N204-200P-1	H.264	̣ 2,000,000 modules ̣ 3PM 4/6/8mm large lens ̣ Dot matrix four-lamp crystal element 42MIL light board, aluminum plate 2.0 heat dissipation ̣ IR-CUT: full metal lens mount 1/3 ̣ With BNC, network cable, power interface Metal paint shell ̣ Waterproof grade: IP65 ̣ Size 185*80*70MM
	MA-N204-200P-2	H.265	
	MA-N203-200P-1	H.264	̣ 2,000,000 modules ̣ 3PM 4/6/8mm large lens ̣ Dot matrix four-lamp crystal element 42MIL light board, aluminum plate 2.0 heat dissipation ̣ IR-CUT: full metal lens mount 1/3 ̣ With BNC, network cable, power interface Metal paint shell ̣ Waterproof grade: IP65 ̣ Size 185*80*70MM
	MA-N203-200P-2	H.265	
	MA-N202-200P-1	H.264	̣ 2 million modules ̣ 3PM 3.6mm small lens ̣ 36 lightṣ5 light panels 130*65*60MM
	MA-N202-200P-2	H.265	
	MA-N201-200P-1	H.264	̣ 2 million modules ̣ 3PM 3.6mm small lens ̣ 36 lightṣ5 light panels 130*65*60MM

	MA-N201-200P-2	H.265	With BNC, network cable, power interface All-metal paint shell Waterproof grade: IP65 Size 130*65*60MM
	MA-N101-200P-1	H.264	2 million modules 3PM 3.6 small lens 24 lights5 light boards
	MA-N101-200P-2	H.265	
Camera power adapter			
	PW-12V-1A	DC12V/1.5A power supply	12V/1A power supply Adapt to FOCUS IP camera
	PW-5V-2A	DC5V/2A power supply	5V/2A power supply Adapt to FOCUS IP camera
	PW-5V-1A	DC5V/1A power supply	5V/1A power supply Adapt to FOCUS IP camera




Shop online at <https://www.vedardalarm.com>





Economical wireless alarm host (PSTN networking)



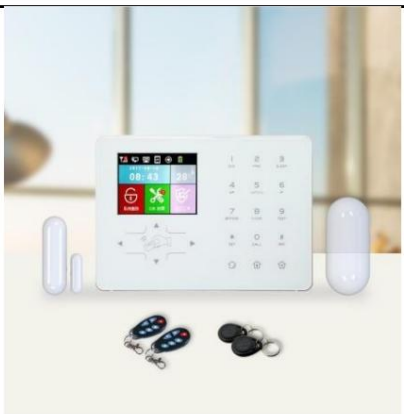

	FC-300 stand-alone	power supply	1	
	FC-300 Standard Package	MC-55R	1	<ul style="list-style-type: none"> • The whole process of voice prompts, LCD liquid crystal graphic information display. • 8 wired defense zones and 32 wireless defense zones. • Telephone network communication alarm, Contact ID network alarm communication protocol. • 2 alarm center telephones and 4 voice alarm telephones. • Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming. • Remote off-site arming, disarming, on-site monitoring. • Optional arm/disarm information can be sent online for free. • 433MHz/868MHz frequency optional, ASK wireless networking.
		MD-209R	1	
		PB-403R	2	
		power supply	1	
	ST-III stand-alone	power supply	1	<ul style="list-style-type: none"> • The whole process of voice prompts, LCD liquid crystal graphic information display. • 8 wired defense zones and 32 wireless defense zones. • Telephone network communication alarm, Contact ID network alarm communication protocol. • 2 alarm center telephones and 4 voice alarm telephones. • Built-in GSM module, support GPRS data transmission. • 8-way electrical control, electrical switch timing control. • Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming. • Remote off-site arming, disarming, on-site monitoring. • Optional arm/disarm information can be sent online for free. • Built-in rechargeable lithium battery 11.1V 1000MHA • 433MHz/868MHz frequency optional, ASK wireless networking.
	ST-III standard set	MC-55R	1	
		MD-209R	1	
		PB-403R	2	
		power supply	1	





Functional wireless alarm host (PSTN+GPRS networking)


	ST-IIIC stand-alone	power supply	1	<ul style="list-style-type: none"> • Full voice prompt, full touch glass panel.
		MC-55R	1	<ul style="list-style-type: none"> • 8 wired defense zones and 32 wireless defense zones. Two-way wireless communication. • Telephone network communication alarm, Contact ID network alarm communication protocol. • 2 alarm center telephones and 4 voice alarm telephones.
		MD-209R	1	<ul style="list-style-type: none"> • Built-in GSM module, support GPRS data transmission. • 8-way electrical control, electrical switch timing control. • Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming. • RF card swipe to arm and disarm; remote off-site arming, disarming, and on-site monitoring.

ST-IIIC standard set

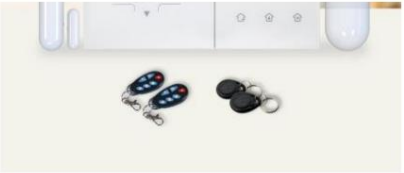	ST-IIIC standard set	PB-403R	2	<ul style="list-style-type: none">γ 8-way electrical control, electrical switch timing control.γ Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming.γ RF card swipe to arm and disarm; remote off-site arming, disarming, and on-site monitoring.γ Optional arm/disarm information can be sent online for free.γ Mobile APP remote operation control.γ Built-in rechargeable lithium battery 3.7V 1800mAhγ 433MHz/868MHz frequency optional, ASK wireless networking.
		RF proximity card	2	
		power supply	1	
	ST-IIIB stand-alone	power supply	1	<ul style="list-style-type: none">γ Full voice prompt, full touch glass panel.γ 8 wired defense zones and 32 wireless defense zones. Two-way wireless communication.γ Telephone network communication alarm, Contact ID network alarm communication protocol.γ 2 alarm center telephones and 4 voice alarm telephones.γ Built-in GSM module, support GPRS data transmission.γ 8-way electrical control, electrical switch timing control.γ Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming.γ Remote off-site arming, disarming, on-site monitoring.γ Optional arm/disarm information can be sent online for free.γ Mobile APP remote operation control.γ Built-in rechargeable lithium battery 11.1V 1000mAhγ 433MHz/868MHz frequency optional, ASK wireless networking.
	ST-IIIB standard set	MC-55R	1	
		MD-209R	1	
		PB-403R	2	
		power supply	1	
	ST-VB stand-alone	power supply	1	<ul style="list-style-type: none">γ Full voice prompt, full touch glass panel.γ 8 wired defense zones and 32 wireless defense zones. Two-way wireless communication.γ Telephone network communication alarm, Contact ID network alarm communication protocol.γ 2 alarm center telephones and 4 voice alarm telephones.γ Built-in GSM module, support GPRS data transmission.γ 16-way electrical control, electrical switch timing control.γ Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming.γ Remote off-site arming, disarming, on-site monitoring.γ Optional arm/disarm information can be sent online for free.γ Mobile APP remote operation control.γ Built-in rechargeable lithium battery 11.1V 1000mAhγ 433MHz/868MHz frequency optional, ASK wireless networking.
	ST-VB Standard Package	MC-55R	1	
		MD-209R	1	
		PB-403R	2	
		power supply	1	
Internet function wireless alarm host (WIFI+GPRS networking)				
	HA-VGW stand-alone	power supply	1	<ul style="list-style-type: none">γ Brilliant color screen display, menu operation.γ Full voice prompt, full touch glass panel.γ 32 wireless defense zones. Two-way wireless communication.γ Built-in GSM module, support GPRS data transmission.γ Built-in TCP/IP module, support network data transmission.γ 16-way electrical control, electrical switch timing control.γ Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming.γ RF card swipe to arm and disarm; remote off-site arming, disarming, and on-site monitoring.γ Mobile APP remote operation control.γ Computer IE remote operation control.
		MC-565R	1	
		MD-211R	1	
	HA-VGW Standard Package			


	HA-VGW Standard Package	PB-403R	2	<ul style="list-style-type: none">γ 16-way electrical control, electrical switch timing control.γ Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming.γ RF card swipe to arm and disarm; remote off-site arming, disarming, and on-site monitoring.γ Mobile APP remote operation control.γ Computer IE remote operation control.γ Set 32 defense zones that can be associated with video through the APP.γ Built-in rechargeable lithium battery 11.1V 1000mAhγ 433MHz/868MHz frequency optional, ASK wireless networking.
		RF proximity card	2	
		power supply	1	
	HA-IIIGW stand-alone	power supply	1	<ul style="list-style-type: none">γ Brilliant color screen display, menu operation.γ Full voice prompt, full touch glass panel, aluminum alloy frame.γ 32 wireless defense zones, two-way wireless communication.γ Built-in WIFI module, one-key connection.γ Built-in GSM module, support GPRS data transmission.γ 16-way electrical control, remote control of smart home appliances.γ Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming.γ RF card swipe to arm and disarm; remote off-site arming, disarming, and on-site monitoring.γ Mobile APP remote operation control.γ Computer IE remote operation control.γ Set 32 defense zones that can be associated with video through the APP.γ Built-in rechargeable lithium battery 3.7V 1000mAhγ 433MHz/868MHz frequency optional, ASK wireless networking.
	HA-IIIGW standard set	MC-565R	1	
		MD-221R	1	
		PB-403R	2	
		RF proximity card	2	
		power supply	1	
	HA-IIIIGW stand-alone	power supply	1	<ul style="list-style-type: none">γ Brilliant color screen display, menu operation.γ Full voice prompt, full touch glass panel, aluminum alloy frame.γ 32 wireless defense zones, two-way wireless communication.γ Built-in WIFI module, one-key connection.γ Built-in GSM module, support GPRS data transmission.γ 16-way electrical control, remote control of smart home appliances.γ Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming.γ RF card swipe to arm and disarm; remote off-site arming, disarming, and on-site monitoring.γ Mobile APP remote operation control.γ Computer IE remote operation control.γ Set 32 defense zones that can be associated with video through the APP.γ Built-in rechargeable lithium battery 3.7V 1000mAhγ 433MHz/868MHz frequency optional, ASK wireless networking.
	HA-IIIIGW Standard suit	MC-565R	1	
		MD-221R	1	
		PB-403R	2	
		RF proximity card	2	
		power supply	1	
	ST-IIIIGW stand-alone	power supply	1	<ul style="list-style-type: none">γ Full voice prompt, full touch glass panel, aluminum alloy frame.γ 64 wireless defense zones, two-way wireless communication.γ Built-in WIFI module, one-key connection.γ Built-in GSM module, support GPRS data transmission.γ 16-way electrical control, electrical switch timing control.γ Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming.
		MC-565R	1	

	ST-IIIGW Standard suit	MD-221R	1	ỹ 64,. ỹ Built-in WIFI module, one-key connection. ỹ Built-in GSM module, support GPRS data transmission. ỹ 16-way electrical control, electrical switch timing control. ỹ Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming. ỹ RF card swipe to arm and disarm; remote off-site arming, disarming, and on-site monitoring. ỹ Mobile APP remote operation control. ỹ Computer IE remote operation control. ỹ Built-in rechargeable lithium battery 3.7V 1000mAh ỹ 433MHz/868MHz frequency optional, ASK wireless networking.
	ST-IIICGW stand-alone	power supply	1	
	MA-III stand-alone	power supply	1	ỹ Full voice prompt, full touch glass panel. ỹ 32 wireless defense zones, two-way wireless communication. ỹ Built-in GSM module, support GPRS data transmission. ỹ Built-in TCP/IP module, support network data transmission. ỹ 16-way electrical control, electrical switch timing control. ỹ Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming. ỹ RF card swipe to arm and disarm; remote off-site arming, disarming, and on-site monitoring. ỹ Mobile APP remote operation control. ỹ Computer IE remote operation control. ỹ Built-in rechargeable lithium battery 7.4V 1800mAh ỹ 433MHz/868MHz frequency optional, ASK wireless networking.
	HA-VGT(A) stand-alone	power supply	1	ỹ Brilliant color screen display, menu operation. ỹ Full voice prompt, full touch glass panel. ỹ 8 wired defense zones and 32 wireless defense zones. Two-way wireless communication. ỹ Built-in 4G module, support 4G data transmission, support SMS and phone dialing. ỹ Built-in TCP/IP module, support network data transmission.

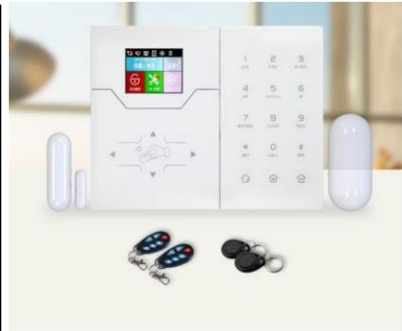


HA-VGT(A) Standard Package	MC-565R	1	<ul style="list-style-type: none">Brilliant color screen display, menu operation.Full voice prompt, full touch glass panel.8 wired defense zones and 32 wireless defense zones. Two-way wireless communication.Built-in 4G module, support 4G data transmission, support SMS and phone dialing.Built-in TCP/IP module, support network data transmission.16-way electrical control, electrical switch timing control.Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming.RF card swipe to arm and disarm; remote off-site arming, disarming, and on-site monitoring.Mobile APP remote operation control.Computer IE remote operation control.Set 32 defense zones that can be associated with video through the APP.Built-in rechargeable lithium battery 11.1V 1000mAh433MHz/868MHz frequency optional, ASK wireless networking.
	MD-211R	1	
	PB-403R	2	
	RF proximity card	2	
	power supply	1	

Internet function wireless alarm host (GPRS+TCP/IP networking)

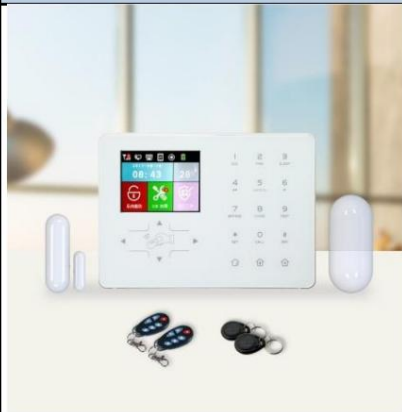

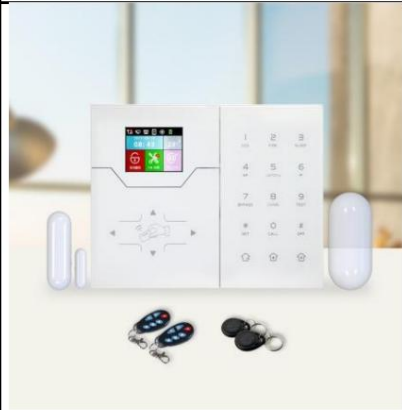


HA-IIID stand-alone	power supply	1	<ul style="list-style-type: none">Brilliant color screen display, menu operation.Full voice prompt, full touch glass panel.32 wireless defense zones, two-way wireless communication.Built-in GSM module, support GPRS data transmission.Built-in TCP/IP module, support network data transmission.16-way electrical control, electrical switch timing control.Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming.RF card swipe to arm and disarm; remote off-site arming, disarming, and on-site monitoring.Mobile APP remote operation control.Computer IE remote operation control.Set 32 defense zones that can be associated with video through the APP.Built-in rechargeable lithium battery 3.7V 1600mAh433MHz/868MHz frequency optional, ASK wireless networking.
HA-IIID standard set	MC-565R	1	
	MD-211R	1	
	PB-403R	2	
	RF proximity card	2	
	power supply	1	






HA-VGT stand-alone	power supply	1	<ul style="list-style-type: none">Brilliant color screen display, menu operation.Full voice prompt, full touch glass panel.8 wired defense areas + 32 wireless defense areas, two-way wireless communication.Built-in GSM module, support GPRS data transmission.Built-in TCP/IP module, support network data transmission.16-way electrical control, electrical switch timing control.Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming.RF card swipe to arm and disarm; remote off-site arming, disarming, and on-site monitoring.Mobile APP remote operation control.Computer IE remote operation control.Set 32 defense zones that can be associated with video through the APP.Built-in rechargeable lithium battery 11.1V 1000mAh433MHz/868MHz frequency optional, ASK wireless networking.
HA-VGT Standard Package	MC-565R	1	
	MD-211R	1	
	PB-403R	2	
	RF proximity card	2	





Machine Translated by Google



		power supply	1	<div>ÿ Set 32 defense zones that can be associated with video through the APP.</div> <div>ÿ Built-in rechargeable lithium battery 11.1V 1000mAh</div> <div>ÿ 433MHz/868MHz frequency optional, ASK wireless networking.</div>
	ST-IIID stand-alone	power supply	1	
	ST-IIID standard set	MC-565R	1	<div>ÿ Full voice prompt, full touch glass panel.</div> <div>ÿ 32 wireless defense zones, two-way wireless communication.</div> <div>ÿ Built-in GSM module, support GPRS data transmission.</div> <div>ÿ Built-in TCP/IP module, support network data transmission.</div> <div>ÿ 16-way electrical control, electrical switch timing control.</div> <div>ÿ Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming.</div> <div>ÿ RF card swipe to arm and disarm; remote off-site arming, disarming, and on-site monitoring.</div> <div>ÿ Mobile APP remote operation control.</div> <div>ÿ Computer IE remote operation control.</div>
		MD-211R	1	<div>ÿ Set 32 defense zones that can be associated with video through the APP.</div> <div>ÿ Built-in rechargeable lithium battery 3.7V 1600mAh</div> <div>ÿ 433MHz/868MHz frequency optional, ASK wireless networking.</div>
		PB-403R	2	
		RF proximity card	2	
		power supply	1	
	ST-VGT stand-alone	power supply	1	
	ST-VGT Standard Package	MC-565R	1	<div>ÿ Full voice prompt, full touch glass panel.</div> <div>ÿ 8 wired defense areas + 32 wireless defense areas, two-way wireless communication.</div> <div>ÿ Built-in GSM module, support GPRS data transmission.</div> <div>ÿ Built-in TCP/IP module, support network data transmission.</div> <div>ÿ 16-way electrical control, electrical switch timing control.</div> <div>ÿ Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming.</div> <div>ÿ RF card swipe to arm and disarm; remote off-site arming, disarming, and on-site monitoring.</div> <div>ÿ Mobile APP remote operation control.</div> <div>ÿ Computer IE remote operation control.</div>
		MD-211R	1	<div>ÿ Set 32 defense zones that can be associated with video through the APP.</div> <div>ÿ Built-in rechargeable lithium battery 11.1V 1000mAh</div> <div>ÿ 433MHz/868MHz frequency optional, ASK wireless networking.</div>
		PB-403R	2	
		RF proximity card	2	
		power supply	1	
Fashion version home Internet network alarm host (GPRS+TCP\IP networking)				
	MA-II stand-alone	power supply	1	<div>ÿ Full voice prompt.</div> <div>ÿ 2 wired defense areas and 32 wireless defense areas, two-way wireless communication.</div>
	MA-II Standard Package	MC-565R	1	<div>ÿ Built-in GSM module, support GPRS data transmission.</div> <div>ÿ Built-in TCP/IP module, support network data transmission.</div> <div>ÿ 16-way electrical control, electrical switch timing control.</div> <div>ÿ Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming.</div> <div>ÿ RF card swipe to arm and disarm; remote off-site arming, disarming, and on-site monitoring.</div> <div>ÿ Mobile APP remote operation control.</div> <div>ÿ Computer IE remote operation control.</div>
		MD-209R	1	<div>ÿ Built-in rechargeable battery 7.4V 1800mAh</div>

Machine Translated by Google




	MA-II Standard Package	<div>PB-403R</div> <div>power supply</div>	<div>2</div>	<div>ỹ Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming. ỹ RF card swipe to arm and disarm; remote off-site arming, disarming, and on-site monitoring. ỹ Mobile APP remote operation control. ỹ Computer IE remote operation control. ỹ Built-in rechargeable battery 7.4V 1800mAh 1 ỹ 433MHz/868MHz frequency optional, ASK wireless networking.</div>
	MA-IV stand-alone	<div>power supply</div>	<div>1 ỹ Full</div>	<div>voice prompt. ỹ 32 wireless defense zones, two-way wireless communication. ỹ Built-in GSM module, support GPRS data transmission. ỹ Built-in TCP/IP module, support network data transmission. ỹ 16-way electrical control, electrical switch timing control. ỹ Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming. ỹ RF card swipe to arm and disarm; remote off-site arming, disarming, and on-site monitoring. ỹ Mobile APP remote operation control. ỹ Computer IE remote operation control. ỹ Built-in rechargeable battery 7.4V 1800mAh ỹ 433MHz/868MHz frequency optional, ASK wireless networking.</div>
	MA-IV Standard Package	<div>MC-565R</div>	<div>1</div>	<div>ỹ Built-in GSM module, support GPRS data transmission. ỹ Built-in TCP/IP module, support network data transmission. ỹ 16-way electrical control, electrical switch timing control. ỹ Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming. ỹ RF card swipe to arm and disarm; remote off-site arming, disarming, and on-site monitoring. ỹ Mobile APP remote operation control. ỹ Computer IE remote operation control. ỹ Built-in rechargeable battery 7.4V 1800mAh ỹ 433MHz/868MHz frequency optional, ASK wireless networking.</div>
		<div>MD-209R</div>	<div>1</div>	
		<div>PB-403R</div>	<div>2</div>	
		<div>power supply</div>	<div>1</div>	
Wireless Outdoor Detector				
	FT-89RS	<div>Solar Wireless Outdoor Quad Tech Detector</div>		<div>ỹ Detection method: DG-89RS--2*PIR FT-89RS--2*PIR+MW</div> <div>ỹ Detection distance: 9m/12m/18m ỹ</div> <div>Detection angle: 110°/90°/30° ỹ Use battery: 2x18650 ỹ Battery life: DG-89RS: more than 3 years FT-89RS: more than 1 year</div> <div>ỹ Transmit frequency: 433MHz/868MHz optional</div>
	FT-89R	<div>Wireless Outdoor Quad Tech Detector</div>		<div>ỹ Detection method: DG-89R--2*PIR FT-89R--2*PIR+MW ỹ</div> <div>Detection distance: 9m/12m/18m ỹ Detection angle: 110°/90°/30° ỹ Use battery: 2x18650 ỹ Battery life: DG-89R: more than 3 years FT-89R: More than 1 year</div> <div>ỹ Transmit frequency: 433MHz/868MHz optional</div>
Wireless Indoor Detector				

	DM-7380R	Wireless Ceiling Infrared Detector	̈ Detection method: dual-element passive infrared ̈ Detection distance: 6 meters in diameter ̈ Installation height: 2.4—3.6 meters ̈ Use battery: 2*AA ̈ Static power consumption: <15uA ̈ Anti-pet function: <15KG 868MHz optional
	DM-448R (Direction Recognition)	Wireless Double Curtain Detector (Direction Recognition)	̈ Detection method: dual-element passive infrared ̈ Detection distance: 0.8*9m@25̈ ̈ Detection angle: 10° ̈ Use battery: 2*AA ̈ Static power consumption: <15uA ̈ Anti-pet function: <15KG ̈ Transmission frequency: 433MHz / 868MHz optional
	MC-565R	Wireless Anti-Pet Infrared Detector	̈ Detection method: dual-element passive infrared ̈ Detection distance: 12M ̈ Detection angle: 110° ̈ Use battery: 1*CR123 ̈ Static power consumption: <15uA ̈ Anti-pet function: <15KG ̈ Networking method: ASK/FSK optional ̈ Transmission frequency: 433MHz/868MHz optional
	MC-565R (FSK)		
	MC-575R	Wireless Anti-Pet Infrared Detector	̈ Detection method: dual-element passive infrared ̈ Detection distance: 12M ̈ Detection angle: 110° ̈ Use battery: 1*CR123 ̈ Static power consumption: <15uA ̈ Anti-pet function: <15KG ̈ Networking method: ASK/FSK optional ̈ Transmission frequency: 433MHz/868MHz optional
	MC-575R (FSK)		
	MC-435R Wireless Anti-pet Infrared Detector		̈ Detection method: dual-element passive infrared ̈ Detection distance: 12M ̈ Detection angle: 110° ̈ Use battery: 1*CR123 ̈ Static power consumption: <15uA ̈ Anti-pet function: <15KG ̈ Transmission frequency: 433MHz/ 868MHz optional







	MC-8250R Wireless Anti-pet Infrared Detector		ỹ Detection method: dual-element passive infrared ỹ Detection distance: 12M ỹ Detection angle: 110° ỹ Use battery: 1*CR123 ỹ Static power consumption: <15uA ỹ Anti-pet function: <15KG ỹ Transmission frequency: 433MHz/868MHz optional
	MC-55R	wireless infrared detector	ỹ Detection method: dual-element passive infrared ỹ Detection distance: 12M ỹ Detection angle: 110° ỹ Use battery: 3*AA ỹ Static power consumption: <15uA ỹ Transmission frequency: 433MHz/868MHz optional
	MC-335R Wireless Anti-pet Infrared Detector		ỹ Detection method: dual-element passive infrared ỹ Detection distance: 9M ỹ Detection angle: 110° ỹ Use battery: 1*CR123 ỹ Static power consumption: <15uA ỹ Anti-pet function: <15KG ỹ Transmission frequency: 433MHz/868MHz optional
	DT-335R Wireless Anti-pet Dual Detector		ỹ Detection method: dual-element passive infrared + microwave ỹ Detection distance: 9M ỹ Detection angle: 110° ỹ Use battery: 2*CR123 ỹ Static power consumption: <25uA ỹ Anti-pet function: <15KG ỹ Transmission frequency: 433MHz/868MHz select
	MC-355R Wireless Anti-pet Infrared Detector		ỹ Detection method: dual-element passive infrared ỹ Detection distance: 12M ỹ Detection angle: 110° ỹ Use battery: 1*CR123 ỹ Static power consumption: <15uA ỹ Anti-pet function: <15KG ỹ Transmission frequency: 433MHz/868MHz optional







	PE-81R	Wireless Anti-Pet Infrared Detector	ȳ Detection method: dual-element passive infrared ȳ Detection distance: 12M ȳ Detection angle: 110° ȳ Use battery: 1*CR123 ȳ Static power consumption: <15uA ȳ Anti-pet function: <15KG ȳ Transmission frequency: 433MHz/868MHz optional
	DT-81R	Wireless Anti-pet Dual Detector	ȳ Detection method: dual-element passive infrared + microwave ȳ Detection distance: 12M ȳ Detection angle: 110° ȳ Use battery: 2*CR123 ȳ Static power consumption: <25uA ȳ Anti-pet function: <15KG ȳ Transmission frequency: 433MHz/868MHz select
wireless fire detector			
	MD-2100R	wireless smoke detector	ȳ Independent/networked/wireless output mode (optional); ȳ Power supply mode: 2*CR123 ȳ Sensitivity: 2.06%ft±1.3%ft ȳ Alarm output: ȳ85dB ȳ Operating temperature: -10ȳ→+50ȳ ȳ Transmitting frequency : 433MHz/868MHz optional
	MD-2105R	Wireless Smoke Detector (with Voice)	ȳ Independent/networked/wireless output mode (optional); ȳ Power supply mode: 2*CR123 ȳ Sensitivity: 2.06%ft±1.3%ft ȳ Alarm output: ȳ85dB ȳ Operating temperature: -10ȳ→+50ȳ ȳ Transmitting frequency : 433MHz/868MHz optional
	MD-2105R(FSK)		
	MD-2106R	wireless smoke detector	ȳ Independent/networked/wireless output mode (optional); ȳ Power supply mode: 2*CR123 ȳ Sensitivity: 2.06%ft±1.3%ft ȳ Alarm output: ȳ85dB ȳ Operating temperature: -10ȳ→+50ȳ ȳ Transmitting frequency : 433MHz/868MHz optional







	MD-2107R(FSK) Wireless Smoke Detector		ȳ Independent/networked/wireless output mode (optional); ȳ Power supply mode: 1*CR123 ȳ Sensitivity: 2.06%ft±1.3%ft ȳ Alarm output: ȳ85dB ȳ Operating temperature: -10ȳ+50ȳ ȳ Transmitting frequency : 433MHz/868MHz optional
	MD-2000R	Wireless gas detector (including power supply D12V 1A)	ȳ Nano sensor, automatic reset when the alarm is excluded; ȳ Measurable gas: natural gas, coal gas, liquefied petroleum gas; ȳ Buzzer volume ȳ 85dB ȳ Power supply: AC16.5V/DC12V-15V ȳ Transmission frequency: 433MHz/868MHz optional
	MD-2003R	Wireless gas detector (with voice function) (including power supply D12V 1A)	ȳ Nano sensor, automatic reset when the alarm is excluded; ȳ Measurable gas: natural gas, coal gas, liquefied petroleum gas; ȳ With solenoid valve driving function; ȳ Buzzer volume ȳ 85dB ȳ Power supply: AC16.5V/DC12V-15V ȳ Transmit Frequency: 433MHz/868MHz optional
	MD-2002R	Wireless gas detector (with voice function) (including power supply D12V 1A)	ȳ Nano sensor, automatic reset when the alarm is excluded; ȳ Measurable gas: natural gas, coal gas, liquefied petroleum gas; ȳ With solenoid valve driving function; ȳ Buzzer volume ȳ 85dB ȳ Power supply: AC16.5V/DC12V-15V ȳ Transmit Frequency: 433MHz/868MHz optional
	MD-2006R(FSK)	Wireless gas detector (with voice function) (including power supply D12V 1A)	ȳ Nano-sensor, automatic reset after alarm exclusion; ȳ GLASS concentration, real-time temperature and humidity display; ȳ Live voice alarm; ȳ Measurable gases: natural gas, coal gas, liquefied petroleum gas; ȳ Buzzer volume ȳ 85dB ȳ Power supply: AC110V -240V/50-60Hz ȳ Transmit frequency: 433MHz/ 868MHz optional
	MD-2001R	Wireless CO Detector	ȳ LCD liquid crystal display, nano-sensor, automatic reset after alarm exclusion; ȳ Measurable gas: carbon monoxide; ȳ With solenoid valve drive function; ȳ Buzzer volume ȳ 85dB ȳ Power supply: 2*AA ȳ Transmission frequency: 433MHz/868MHz select






	MD-2005R	Wireless CO detector (with voice function)	̈ LCD liquid crystal display real-time temperature and humidity, nano-sensor, automatic reset after alarm exclusion; ̈ Live voice alarm; ̈ Measurable gas: carbon monoxide; ̈ With solenoid valve driving function; ̈ Buzzer volume ̈ 85dB ̈ Static power consumption ̈ 35mA ̈ Transmission frequency: 433MHz/868MHz optional ̈ LCD liquid crystal display real-time temperature and humidity, nano-sensor, automatic reset after alarm exclusion; ̈ Live voice alarm; ̈ Measurable gas: carbon monoxide; ̈ With solenoid valve drive function; ̈ Buzzer Volume ̈85dB ̈ Static power consumption ̈35mA ̈ Working voltage: AC110V—240V/50-60Hz ̈ Transmission frequency: 433MHz/868MHz optional
	MD-2006R	Wireless CO detector (with voice function)	
wireless environment detector			
	MD-230R	Wireless Flooding Detector	̈ Alarm output: normally open and normally closed output ̈ Wireless transmission distance (open space): more than 180 meters ̈ Transmission frequency: 433MHz/868MHz optional
	MD-230R (FSK)		
	MD-231R	Wireless Flooding Detector	̈ Alarm output: normally open and normally closed output ̈ Wireless transmission distance (open space): more than 180 meters ̈ Transmission frequency: 433MHz/868MHz optional
	MD-240R	wireless temperature detector	̈ Alarm temperature: 40̈-80̈ optional ̈ Working voltage: 3V ̈ Working current: quiescent current less than 10uA; alarm current 30mA 433MHz/868MHz optional






	MD-343R	Wireless Glassbreak Detector	<ul style="list-style-type: none"> γ Detecting the breaking sound of ordinary glass, tamper-proof glass, laminated glass, wire glass, film glass, double insulating glass; γ Adjustable sensitivity range: the maximum range is 4.6m, and there is no minimum distance in all directions; γ Power supply voltage: 3V (CR123 battery) γ Working current: about 15mA (when alarming); about 35μA (when static) γ Wireless transmission distance: 100m (open space) γ Transmission frequency: 433MHz/868MHz optional
	MD-2018R	Wireless Vibration Detector	<ul style="list-style-type: none"> γ Adopt vibration, touch, mobile omnidirectional detection principle; γ Vibration sensitivity is divided into three gears: high, medium, low; freely change the sensitivity; γ Has low battery indicator; ATM etc. γ Transmission frequency: 433MHz/868MHz optional
Wireless Door and Window Magnetic Detector			
	MD-209R	Wireless door sensor	<ul style="list-style-type: none"> γ Magnetic range: 2.5CM γ Transmission distance: 250m γ Battery: 3*AAA γ Installation method: Surface mount γ Transmission frequency: 433MHz/868MHz optional
	MD-210R	Wireless door sensor	<ul style="list-style-type: none"> γ Magnetic range: 2.5CM γ Transmission distance: 250m γ Battery: CR123A γ Installation method: Surface mount γ Transmission frequency: 433MHz/868MHz optional
	MD-211R	Wireless door sensor	<ul style="list-style-type: none"> γ Magnetic range: 2.5CM γ Transmission distance: 250m γ Battery: CR123A γ Installation method: Surface mount γ Networking mode: ASK/FSK optional γ Transmission frequency: 433MHz/868MHz optional
	MD-211R (FSK)		
	MD-215R	Wireless door sensor	<ul style="list-style-type: none"> γ Use battery: 2*CR2032 γ Magnetic range: 1.8CM γ Transmission distance: 250m γ Installation method: Surface mount γ Transmission frequency: 433MHz/868MHz optional






	MD-216R	Wireless door sensor	ỹ Use battery: 2*CR2032 ỹ Magnetic range: 1.8CM ỹ Transmission distance: 250m ỹ Installation method: Surface mount ỹ Transmission frequency: 433MHz/868MHz optional
	MD-219R	Wireless door sensor	ỹ Magnetic range: 2.5CM ỹ Transmission distance: 250m ỹ Use battery: 2*AA ỹ Installation method: Surface mount ỹ Transmission frequency: 433MHz/868MHz optional
	MD-212R	Wireless rolling shutter door sensor	ỹ Magnetic range: 1.8CM ỹ Transmission distance: 250m ỹ Use battery: CR123 ỹ Installation method: Surface mount ỹ Transmission frequency: 433MHz/868MHz optional
	MD-139R	Wireless Window Magnetic Detector	Shell Material: ABS
Wireless Smart Remote			
	PB-403R	Wireless Smart Remote	ỹ 6-key function remote control ỹ Emergency help function ỹ Transmit frequency: 433MHz/868MHz ỹ Status report: alarm/recovery/low voltage/tamper
	PB-403R(FSK)		
	PB-433R	Wireless Smart Remote	ỹ 4-key function remote control ỹ Metal panel + protective cover ỹ 433MHz/868MHz ỹ Status report: alarm/recovery/low voltage/tamper





	PB-422R	Wireless Smart Remote	̣ 4-key function remote control, two-way transceiver ̣ Metal panel, LED LCD display ̣ 433MHz/868MHz ̣ Status report: alarm/recovery/low voltage/tamper
	PB-422R(FSK)		
	PB-473R	Wireless smart remote control (high power)	̣ 4-key function remote control ̣ Dedicated for multi-function IP camera ̣ 433MHz/868MHz ̣ Status report: alarm/recovery/low voltage/tamper
Wireless sound and light siren			
	MD-204	Wireless siren (including power supply DC5V 2A)	̣ DC power supply: DC12V ̣ Built-in battery: 5V 2000mAh ̣ Working mode: two-way transceiver ̣ Siren sound: >100 dB ̣ Transmission frequency: 433MHz/868MHz optional
	MD-214R	Wireless sound and light siren (including power supply DC5V 2A)	̣ DC power supply: DC12V ̣ Built-in battery: 5V 2000mAh ̣ Working mode: two-way transceiver ̣ Siren sound: >100 dB ̣ Transmission frequency: 433MHz/868MHz optional
	MD-314R	Wireless sound and light siren (including power supply DC5V 2A)	̣ DC power supply: DC12V ̣ Built-in battery: 5V 2000mAh ̣ Working mode: two-way transceiver ̣ Siren sound: >100 dB ̣ Transmission frequency: 433MHz/868MHz optional
	MD-315R(FSK)	Wireless sound and light siren	̣ Built-in battery: 4*AAA battery ̣ Working mode: two-way transceiver ̣ Siren sound: > 110 dB ̣ Networking method: ASK/FSK optional


	MD-316R(FSK)	Wireless sound and light siren (including power supply DC12V 1A)	̣ DC power supply: DC12V ̣ Working mode: two-way transceiver ̣ Siren sound: > 110 dB ̣ Networking method: FSK optional ̣ Transmission frequency: 433MHz/868MHz optional
	MD-313R	Wireless sound and light siren	̣ Built-in battery: 3*A battery ̣ Working mode: two-way transceiver ̣ Siren sound: > 110 dB ̣ Networking method: ASK/FSK optional ̣ Transmission frequency: 433MHz/868MHz optional
	MD-313R (FSK)		
	MD-334R	Wireless sound and light siren	̣ DC power supply: DC12V ̣ Built- in battery: 7.4V 1800mAh ̣ Working mode: two- way transceiver ̣ Siren sound: >100 dB ̣ Transmission frequency: 433MHz/868MHz optional
	MD-324R	Wireless sound and light siren	̣ Built-in battery: 4*A battery ̣ Working mode: two-way transceiver ̣ Siren sound: >100 dB ̣ Transmission frequency: 433MHz/868MHz optional
	MD-325R	Wireless sound and light siren	̣ Built-in battery: 7.2V 2000mAh ̣ Working mode: two-way transceiver ̣ Siren sound: >100 dB ̣ Transmission frequency: 433MHz/868MHz optional
	MD-326R	Wireless sound and light siren (solar powered)	̣ Built-in battery: 3.7V 6000mAh battery ̣ Working mode: two-way transceiver ̣ Siren sound: >100 dB ̣ Transmission frequency: 433MHz/868MHz optional

	MD-335R	Wireless sound and light siren (solar powered)	ˆ Built-in battery: 3.7V 6000mAh low temperature battery ˆ Working mode: two-way transceiver ˆ Siren sound: >100 dB ˆ Transmission frequency: 433MHz/868MHz optional
	MD-327R	Wireless sound and light siren	ˆ Built-in battery: 4*A battery ˆ Working mode: two-way transceiver ˆ Siren sound: > 110 dB ˆ Transmission frequency: 433MHz/868MHz optional
	MD-328R	Wireless sound and light siren	ˆ Built-in battery: 7.2V 2000mAh ˆ Working mode: two-way transceiver ˆ Siren sound: >100 dB ˆ Transmission frequency: 433MHz/868MHz optional
	MD-329R	Wireless sound and light siren	ˆ DC power supply: AC100V-240V ˆ Built-in battery: 3.7V/600mAh ˆ Working mode: two-way transceiver ˆ Siren sound: >100 dB ˆ Transmission frequency: 433MHz/868MHz optional
wireless keyboard			
	PB-500R	wireless keyboard	ˆ Graphic and text LCD display; ˆ The keyboard has a tamper switch and has a function of limiting the number of times of wrong password input; ˆ Periodically check the self-working status; ˆ Working voltage 6V (AAA1.5V*4) ˆ Transmission frequency: 433MHz/868MHz optional






	PB-501R	Touch wireless two-way keyboard (including 5V 2A power supply)	<ul style="list-style-type: none"> • Graphic LCD display, full touch glass panel, aluminum alloy frame; • Two-way wireless communication with the alarm host. • Working voltage: 3.7V/1800mA • Wireless transmission distance: 75m (open space) • Transmission power: 12dB • Transmission frequency: 433MHz/868MHz optional
	PB-502R	Wireless two-way keyboard	<ul style="list-style-type: none"> • Graphic LCD display; • Two-way wireless communication with the alarm host. • Working voltage: 3.7V/1800mA • Wireless transmission distance: 75m (open space) • Transmission power: 12dB • Transmission frequency: 433MHz/868MHz optional
	PB-503R	Touch wireless two-way keyboard (including 5V 2A power supply)	<ul style="list-style-type: none"> • Graphic LCD display, full touch glass panel; • Two-way wireless communication with the alarm host. • Working voltage: 3.7V/1800mA • Wireless transmission distance: 75m (open space) • Transmission power: 12dB
Wireless Panic Button/Wireless Doorbell			
	PB-200R	wireless emergency button	<ul style="list-style-type: none"> • 86 electrical box structure • Surface mountable • Timing status report • 433/868MHz • ASK/FSK optional
	PB-200R (FSK)		
	PB-201R	wireless emergency button	<ul style="list-style-type: none"> • Chest-mounted emergency button • Waterproof grade IP55 • 433/868MHz

	PB-202R	wireless emergency button	<ul style="list-style-type: none"> • Chest-mounted emergency button • Waterproof grade IP55 • 433/868MHz
	PB-506R	wireless door bell	<ul style="list-style-type: none"> • 86 electrical box structure • Surface mountable • Timing status report • 433/868MHz
	PB-507R	wireless door bell	<ul style="list-style-type: none"> • Fashion appearance • Surface mountable • Timing status report • 433/869MHz
Smart Switch/Control Panel/Smart Socket			
	PL-708R	smart switch	<ul style="list-style-type: none"> • Shell material: high-strength tempered glass / flame retardant PC imported from Germany • Frame: silver/gold optional, aluminum alloy frame • Panel: white/black optional • Control method: APP control and manual control • Working voltage: 220V • Limited current : 5A • Single key load: 500W • Service life: When the relay contacts are fully loaded at 220V, the service life is more than 100,000 times • Dimensions: W86mm*H86mm
	PL-708R (FSK)		
	PL-706R	smart switch	<ul style="list-style-type: none"> • Shell material: high-strength tempered glass / flame retardant PC imported from Germany • Panel: white/black optional • Control mode: APP control and manual control • The life of the relay contact is more than 100,000 times when it is fully loaded at 220V • Dimensions: W86mm*H86mm

	PL-707R	smart switch	ȳ Shell material: high-strength tempered glass / flame retardant PC imported from Germany ȳ Frame: silver/gold optional, aluminum alloy frame ȳ Panel: white/black optional ȳ Control method: APP control and manual control ȳ Working voltage: 220V ȳ Limited current : 5A ȳ Single key load: 500W ȳ Service life: When the relay contacts are fully loaded at 220V, the service life is more than 100,000 times ȳ Dimensions: W86mm*H86mm
	PL-707R (FSK)		
	PL-606R	control panel	ȳ High- strength tempered glass panel, aluminum alloy metal frame; ȳ Stylish and elegant appearance, full touch touch operation; ȳ Automatic adjustment function of backlight brightness according to ambient brightness; ȳ Dual-control and multi-control functions for any load; ȳ Centralized control , One-key to achieve scene mode selection; ȳ Simple operation, can replace a variety of remote controls, to achieve a multi-purpose; ȳ Can realize local control of household appliances, lights, curtains, etc.; ȳ Support WIFI, Zigbee, ZWave and other communications protocol.
	PL-608R	control panel	ȳ Size: 172mmx86mmx7mm; ȳ Panel: Bright crystal transparent panel, crystal clear, never deformed or discolored; ȳ Frame: Zinc alloy metal frame, strong and high-grade! ȳ Bottom box: ABS fireproof material; ȳ Color: gem black, crystal white, rose gold, champagne gold, brown and other colors are optional; ȳ Function: wired numerical control technology, unique code matching technology, single and double-channel dimming; ȳ Touch screen: Using the most advanced electronic touch technology, the manual touch can reach more than 100,000 times.
	PL-508R	smart socket	ȳ FSK, ASK and other communication protocols are optional; ȳ Built-in routing function; ȳ Current overload protection function; ȳ Two-way communication function, feedback status; Easy to use APP.
	PL-508R (FSK)		
wireless repeater			

	PB-204R	Wireless repeater (868 frequency)	ÿ Automatically forward wireless signals of various components; ÿ Wireless transmission distance up to 1500m; ÿ Receive sensitivity: -113dB; ÿ Transmit power: <15mW. ÿ Built-in rechargeable lithium battery 7.4V 1000MHA;
	PB-205R	Wireless Repeater (Frequency 433)	ÿ Automatically forward wireless signals of various components; ÿ Wireless transmission distance up to 1500m; ÿ Receive sensitivity: -113dB; ÿ Transmit power: <15mW. ÿ Built-in rechargeable lithium battery 7.4V 1000MHA;
	FC-008R	Wireless to wired repeater	ÿ Receiving sensitivity: -113dB; ÿ Transmitting frequency: 315/433/868MHz; ÿ 8 or 16 wired defense zone output interfaces; ÿ The transmitter can be equipped with 12V rechargeable battery and remote control switch.
	PB-306R	Wireless Relay Control Box	ÿ DC12V power supply ÿ 3 relay outputs ÿ 433/868MHz ÿ ASK/FSK optional
	PB-306R(FSK)		
Wireless alarm warning sign			
	MD-367R (Small)	Alarm linkage light box	ÿ Special alarm speaker for alarm operation company ÿ Built-in wireless transceiver ÿ Built-in arm/disarm display ÿ With host keyboard function ÿ 12VDC/300mA ÿ 105(±3)Db
	MD-366R (Small)	Alarm linkage light box	



Wireless Host Power Adapter

	PW-5V-2A	DC5V/2A power supply	̣ 5V/2A power supply ̣ Adapt to FOCUS wireless alarm host
	PW-5V-1A	DC5V/1A power supply	̣ 5V/1A power supply ̣ Adapt to FOCUS wireless alarm host
	PW-12V-2A	DC12V/2A power supply	̣ 12V/1.5A power supply ̣ Adapt to FOCUS wireless alarm host
	PW-12V-1.5A	DC12V/1.5A power supply	̣ 12V/1.5A power supply ̣ Adapt to FOCUS wireless alarm host
	PW-15V-1.5A	DC15V/1.5A power supply	̣ 15V/1.5A power supply ̣ Adapt to FOCUS wireless alarm host














Shop online at <https://www.vedardalarm.com>






Internet large industrial alarm host

	FC-7688Plus	motherboard	1	<p> ỹ Human-computer interaction: menu operation prompts in both Chinese and English throughout the process. ỹ System capacity: 8 wired, 32 wireless, 88 bus defense zones, a total of 128 defense zones </p> <p> ỹ Interactive equipment: two-way communication, can be connected to 8 two-way wired or wireless keyboards, 8 two-way intelligent remote controls, and 4 two-way wireless sirens. ỹ Communication: Support 2 network alarm platforms and 2 telephone alarm platforms, support 4 personal telephones to send voice and text messages. ỹ GSM communication: SMS, GPRS, TCP/IP alarm and arm and disarm. ỹ Remote control programming: support GPRS, GSM, TCP/IP two-way data transmission and two-way control </p> <p> ỹ Report an event: All Contact ID information. ỹ Home appliance control: 32-way electrical control, electrical switch timing control. ỹ Unique features: Support mobile phone APP remote control, support SD card application upgrade, remote voice prompt operation, AC power failure, wireless/wired probe fault reporting, regular arming and disarming, two sets of timing alarms, automatic self-check time reporting host status. ỹ Expansion function: expandable programmable relay module, serial port module. ỹ Set 32 defense zones that can be associated with video through the APP. </p>
		power supply (AC 15V/3A)	1	
		Plastic case (fireproof material)	1	
	FC-7688A	motherboard	1	<p> ỹ Human-computer interaction: menu operation prompts in both Chinese and English throughout the process. ỹ System capacity: 8 wired, 32 wireless, 88 bus defense zones, a total of 128 defense zones </p> <p> ỹ Interactive equipment: two-way communication, can be connected to 8 two-way wired or wireless keyboards, 8 two-way intelligent remote controls, and 4 two-way wireless sirens. ỹ Communication: Support 2 network alarm platforms and 2 telephone alarm platforms, support 4 personal telephones to send voice and text messages. ỹ GSM communication: SMS, GPRS, TCP/IP alarm and arm and disarm. ỹ Remote control programming: support GPRS, GSM, TCP/IP two-way data transmission and two-way control </p> <p> ỹ Report an event: All Contact ID information. ỹ Home appliance control: 32-way electrical control, electrical switch timing control. ỹ Unique features: Support mobile phone APP remote control, support SD card application upgrade, remote voice prompt operation, AC power failure, wireless/wired probe fault reporting, regular arming and disarming, two sets of timing alarms, automatic self-check time reporting host status. ỹ Expansion function: expandable programmable relay module, serial port module. </p>
		power supply (AC 15V/3A)	1	





		Plastic case (fireproof material)	1	<p>• Home appliance control: 32-way electrical control, electrical switch timing control.</p> <p>• Unique features: Support mobile phone APP remote control, support SD card application upgrade, remote voice prompt operation, AC power failure, wireless/wired probe fault reporting, regular arming and disarming, two sets of timing alarms, automatic self-check time reporting host status. • Expansion function: expandable programmable relay module, serial port module. • Set 32 defense zones that can be associated with video through the APP.</p>
	FC-7688	motherboard	1	<p>• Human-computer interaction: menu operation prompts in both Chinese and English throughout the process. • System capacity: 8 wired, 32 wireless, 88 bus defense zones, a total of 128 defense zones</p> <p>• Interactive equipment: two-way communication, can be connected to 8 two-way wired or wireless keyboards, 8 two-way intelligent remote controls, and 4 two-way wireless sirens. • Communication: Support 2 network alarm platforms and 2 telephone alarm platforms, support 4 personal telephones to send voice and text messages. • GSM communication: SMS, GPRS, TCP/IP alarm and arm and disarm. • Remote control programming: support GPRS, GSM, TCP/IP two-way data transmission and two-way control</p> <p>• Report an event: All Contact ID information. • Home appliance control: 32-way electrical control, electrical switch timing control. • Unique features: Support mobile phone APP remote control, support SD card application upgrade, remote voice prompt operation, AC power failure, wireless/wired probe fault reporting, regular arming and disarming, two sets of timing alarms, automatic self-check time reporting host status. • Expansion function: expandable programmable relay module, serial port module. • Set 32 defense zones that can be associated with video through the APP.</p>
		power supply (AC 15V/3A)	1	
		iron box	1	
	FC-7688LCD	keyboard	1	
	FC-7688LCD (A) keyboard		1	<p>• Aluminum alloy metal edge model • Full touch glass panel</p>
	FC-7601 Single zone module 1 is suitable for			FC-76 series alarm panel






	FC-7603DM 3-way relay		1	Compatible with FC7688/FC7668/FC7664/7564
	FC-7668	motherboard	1	<ul style="list-style-type: none"> Human-computer interaction: menu operation prompts in both Chinese and English throughout the process. System capacity: 8 wired 32 wireless 128 bus defense zones. Interactive equipment: two-way communication, can be connected to 8 two-way wired or wireless keyboards, 16 two-way Smart remote control, 1 two-way wireless siren, unlimited one-way siren. Telephone communication: 4 voice calls, 2 central calls, 2 free arm and disarm calls. GSM communication: SMS, GPRS, TCP/IP alarm and arm and disarm. Remote control programming: support GPRS, GSM, TCP/IP two-way data transmission and two-way control Report an event: All Contact ID information. Home appliance control: 32-way electrical control, electrical switch timing control. Unique function: support SD card application upgrade, remote voice prompt operation, communication Power failure, wireless/wired probe fault reporting, regular arming and disarming, two sets of timing alarms, The automatic self-test time reports the host status. Expansion function: expandable programmable relay module, serial port module.
		power supply (AC 16.5V/3A)	1	
		iron box	1	
	FC-7668LCD	keyboard	1	
	FC-7625MA Bus Extender 1			<ul style="list-style-type: none"> Compatible with FC7668/FC7668/FC7664/7564 RS-485 communication, easy to extend with optical fiber Module with anti-dip switch signal transmission
	FC-Z08 Eight-zone expansion module		1	<ul style="list-style-type: none"> Can be used for FC-76 series host wired defense zone expansion; Wired expansion, connect up to 8 blocks, each block has 8 defense zones, a total of 64 defense zones;
	FC-7668G	GPRS module	1	Adapt to FC-7668 host




	FC-7668P computer interface 1 adapts to FC-7668 host			
	FC-7616DM 16-way relay		1	Adapt to FC-7668 host
	FC-7664	motherboard	1	<p> ỹ Human-computer interaction: menu operation prompts in both Chinese and English throughout the process. ỹ System capacity: 16 wired and 24 wireless or bus defense zones, which can be extended to 24 wireless. ỹ Fortification method: overall fortification, 4 partitions for independent fortification. ỹ Interactive equipment: two-way communication, can connect 8 two-way wired or wireless keyboards, 8 two-way intelligent remote control. ỹ Network communication: telephone network communication alarm. ỹ Telephone communication: 3 alarm center telephones, 4 private alarm telephones, 2 groups of free arming and disarming telephones. ỹ Report an event: All Contact ID information. ỹ Unique features: 16-channel programmable remote control, segmented recording, partitioned defense, automatic monitoring of live sound, AC power failure, wireless/wired detector fault reporting, setting automatic self-check time to report host status, support SD card application upgrade, Remote voice prompt operation, timed arming and disarming. ỹ Extended function: It can be connected internally and externally with alarm sound linkage output. ỹ Scope of application: It is built for your security project bidding to get high marks. </p>
		Power supply (AC16.5V/3A)	1	
		iron box	1	
	FC-7664LCD	keyboard	1	
	FC-7564	motherboard	1	<p> ỹ Man-machine equipment: 8 two-way wired or wireless keyboards, 8 remote controls. ỹ System capacity: 8 wired, 32 wireless, a total of 64 defense zones. </p>
		Power supply (AC16.5V/3A)	1	







		iron box	1	<p>ÿ Man-machine equipment: 8 two-way wired or wireless keyboards, 8 remote controls. ÿ System capacity: 8 wired, 32 wireless, a total of 64 defense zones. ÿ Dual network integration: telephone network, GPRS dual network communication alarm. ÿ Telephone communication: 4 voice calls, 2 data calls, 2 free arm and disarm calls. ÿ GSM communication: SMS, GPRS alarm and arm and disarm. ÿ Remote control programming: support GPRS two-way data transmission and two-way control. ÿ Report event: Contact ID full information. ÿ Extended functions: relay linkage, programmable output.</p>
	FC-7564LCD	keyboard	1	
	FC-7564GPRS	GPRS module	1	
	FC-7640Plus	motherboard	1	<p>ÿ Human-computer interaction: menu operation prompts in both Chinese and English throughout the process. ÿ System capacity: 8 wired and 32 wireless or bus defense zones. ÿ Fortification method: overall fortification. ÿ Interactive equipment: two-way communication, can connect 8 two-way wired or wireless keyboards, 8 two-way intelligent remote control. ÿ Network communication: GPRS, TCP/IP network communication alarm. ÿ GSM communication: SMS, GPRS, TCP/IP alarm and arm and disarm. ÿ Remote control programming: support GPRS, TCP/IP two-way data transmission and two-way control. ÿ Unique features: segmented recording, automatic monitoring of live sound, AC power failure, wireless/wired detector fault reporting, setting automatic self-check time to report host status, and regular arming and disarming. ÿ Extended function: It can be connected internally and externally with alarm sound linkage output. ÿ Set 32 defense zones that can be associated with video through the APP. ÿ Scope of application: It is built for your security project bidding to get high marks.</p>
		Power supply (AC16.5V/3A)	1	
		Plastic case 1		
		motherboard	1	<p>ÿ Human-computer interaction: menu operation prompts in both Chinese and English throughout the process. ÿ System capacity: 8 wired and 32 wireless or bus defense zones. ÿ Fortification method: overall fortification. ÿ Interactive equipment: two-way communication, can connect 8 two-way wired or wireless keyboards, 8 two-way intelligent remote control. ÿ Network communication: GPRS, TCP/IP network communication alarm. ÿ GSM communication: GPRS, TCP/IP and.</p>
FC-7640				






ÿ Human-computer interaction: menu operation prompts in both Chinese and English throughout the process.





	FC-7640	power supply (AC16.5V/3A)	1	ÿ System capacity: 8 wired and 32 wireless or bus defense zones. ÿ Fortification method: overall fortification. ÿ Interactive equipment: two-way communication, can connect 8 two-way wired or wireless keyboards, 8 two-way Smart remote. ÿ Network communication: GPRS, TCP/IP network communication alarm.
		iron box	1	ÿ GSM communication: SMS, GPRS, TCP/IP alarm and arm and disarm. ÿ Remote control programming: support GPRS, TCP/IP two-way data transmission and two-way control. ÿ Unique features: segmented recording, automatic monitoring of live sound, AC power failure, wireless / Wired detector fault reporting, setting automatic self-check time to report the host status, regular deployment and withdrawal Defend.
	FC-7640LCD	keyboard	1	ÿ Extended function: It can be connected internally and externally with alarm sound linkage output. ÿ Set 32 defense zones that can be associated with video through the APP. ÿ Scope of application: It is built for your security project bidding to get high marks.
	FC-7640LCD(A) Keypad		1	ÿ Full touch glass panel
		FC-7640 LAN software 1 can connect multiple hosts to the network, suitable for FC-7540 host.		
Wired Outdoor Detector				
	FT-89	Outdoor Sijian Detector		ÿ Detection method: DG-89: 2 groups of quaternary infrared FT-89: 2 groups of quaternary infrared + dual microwave ÿ Detection distance: 9m/12m/18m ÿ Detection angle: 110°/90°/30° ÿ Anti-blocking: IR active way ÿ Alarm output: Relay ÿ Put pets: 15KG






	FT-85	Outdoor Sijian Detector	<p>γ Detection method:</p> <p>DG-85: 2 groups of quaternary infrared</p> <p>FT-85: 2 groups of quaternary infrared + dual microwave</p> <p>γ Detection distance: 12m γ Detection angle: 110°</p> <p>Anti-blocking: IR active mode γ Alarm output: relay γ Pets: 15KG</p>
	DG-85	outdoor detector	
	ODT-8350	outdoor detector	<p>γ Detection method: dual microwave + quaternary infrared</p> <p>γ Detection distance: 12 meters γ Detection angle: 110°</p> <p>Anti-blocking: IR active mode γ Anti-pet: 15KG</p>
	ODT-8250	outdoor detector	<p>γ Detection method: dual microwave + quaternary infrared</p> <p>γ Detection distance: 12 meters γ Detection angle: 110°</p> <p>Anti-blocking: IR active mode γ Anti-pet: 15KG</p>
	DDP-968	Door and window guard	<p>γ Detection method: 2 groups of quaternary PIR</p> <p>γ Detection distance: length 0.8*width 9m</p> <p>Detection angle: 6° γ Alarm interface: DC30/100</p> <p>γ Supply voltage: DC12</p>
Wired Indoor Detector			
	DT-7380	Ceiling Type Dual Detector	<p>γ Quaternary passive infrared + microwave + artificial intelligence detection technology;</p> <p>γ Detection distance: diameter 6-10m@25γ</p> <p>γ Detection angle: 360°</p>

	DT-8435DMT Wired Anti-pet Dual Detector		• Dual passive infrared + microwave + artificial intelligence detection technology; • Anti-pet: <15KG; • Detection distance: 12m@25° • Detection angle: 110°
	DT-700 Wired Anti-pet Dual Detector		• Quaternary passive infrared + microwave + artificial intelligence detection technology; • Anti-pet: <15KG; • Detection distance: 12m@25° • Detection angle: 110°
	DT-7425 Wired Anti-pet Dual Detector		• Quaternary passive infrared + microwave + artificial intelligence detection technology; • Anti-pet: <15KG; • With lower window to eliminate detection dead angle; • Detection distance: 12m@25° • Detection angle: 110°
	MC-8250DMT Wired Anti-pet Infrared Detector		• Quaternary passive infrared + artificial intelligence detection technology; • Anti-pet: <15KG; • With lower window to eliminate detection dead angle; • Detection distance: 12m@25° • Detection angle: 110°
	MC-435DMT Wired Anti-pet Infrared Detector		• Quaternary passive infrared + artificial intelligence detection technology; • Anti-pet: <15KG; • With lower window to eliminate detection dead angle; • Detection distance: 12m@25° • Detection angle: 110°
	MC-800DMT Wired Anti-pet Infrared Detector		• Quaternary passive infrared + artificial intelligence detection technology; • Anti-pet: <15KG; • Detection distance: 12m@25° • Detection angle: 110°







	MC-215DMT Wired Anti-pet Infrared Detector		<p>• Quaternary passive infrared + artificial intelligence detection technology; • With lower window to eliminate detection dead angle; • Anti-pet: <15KG; • Detection distance: 12m@25° • Detection angle: 110°</p>
	MC-720	Ceiling infrared detector	<p>• Quaternary passive infrared + artificial intelligence detection technology; • Detection distance: diameter 6-9m@25° • Detection angle: 360°</p>
	MD-448DMT Double Curtain Infrared Detector		<p>• Detection method: Quaternary infrared + artificial intelligence detection technology • Anti-pet: <15KG; • Detection distance: length 0.8*width 9m • Detection angle: 10° • Intrusion direction selection</p>
	MD-442DMT Double Curtain Infrared Detector		<p>• Detection method: Quaternary infrared + artificial intelligence detection technology • Anti-pet: <15KG; • Detection distance: length 0.8*width 9m • Detection angle: 10° • Intrusion direction selection</p>
	MD-449DMT Double Curtain Infrared Detector		<p>• Detection method: Quaternary infrared + artificial intelligence detection technology • Anti-pet: <15KG; • Detection distance: length 0.8*width 9m • Detection angle: 10° • Intrusion direction selection</p>
	MX-461	Curtain Infrared Detector	<p>• Detection method: Quaternary infrared + artificial intelligence detection technology • Detection distance: length 0.8*width 5m • Detection angle: 10°</p>

	MX-462	Curtain Infrared Detector	<ul style="list-style-type: none"> • Detection method: Quaternary infrared + artificial intelligence detection technology • Detection distance: length 0.8*width 5m • Detection angle: 10°
Single bus indoor detector			
	MB-235DMT Single Bus Anti-pet Infrared Detector		<ul style="list-style-type: none"> • Quaternary passive infrared + artificial intelligence detection technology; • Anti-pet: <15KG; • Detection distance: 9m@25° • Detection angle: 110°
	MB-435DMT Single Bus Anti-pet Infrared Detector		<ul style="list-style-type: none"> • Quaternary passive infrared + artificial intelligence detection technology; • Anti-pet: <15KG; • With lower window to eliminate detection dead angle; • Detection distance: 12m@25° • Detection angle: 110°
Wired Fire Detector			
	MD-2006	Wired Smoke Detector	<ul style="list-style-type: none"> • 220V power supply, photoelectric type • On-site sound and light alarm, independent use • Automatic reset function • Self-adaptive detection sensitivity • Built-in switching power supply
	MD-2105	Wired smoke detector (with voice function)	<ul style="list-style-type: none"> • 12V power supply, photoelectric type • On-site sound and light alarm, independent use • Automatic reset function • Self-adaptive detection sensitivity • Built-in switching power supply

	MD-2000	Wired Gas Detector	<p>γ Sensor: Semiconductor sensor γ Power supply: AC/220V γ Power consumption: 0.2W γ Alarm sound: >90dB γ Alarm time: 3-30 minutes γ Relay: 1A/220V γ Electromagnetic energy storage: 1 Joule/12V γ Manipulator: 1A/30V</p>
	MD-2003	Wired gas detector (with voice function)	<p>γ Sensor: Electrothermal sensor γ Power supply: 12V DC γ Power consumption: 0.2W γ Alarm sound: >90dB γ Alarm time: 3-30 minutes γ Relay: 1A/220V γ Electromagnetic energy storage: 1 Joule/12V γ Manipulator: 1A /30V</p>
Wired Environmental Detector			
	MD-2019	Vibration Displacement Detector	<p>γ Adopt 3-axis gyroscope sensing technology; γ Vibration/displacement composite technology alarm mode is optional; γ 1~13 levels of sensitivity can be adjusted; γ Support remote and local manual sensitivity adjustment; γ Built-in temperature sensor; γ Two-color LED light indicates the device Working status; γ It has the function of automatically correcting the balance shaft.</p>
	MD-2020	Vibration Displacement Detector	<p>γ Adopt 3-axis gyroscope sensing technology; γ Vibration/displacement composite technology alarm mode is optional; γ 1~10 levels of sensitivity can be adjusted; γ Support remote and local manual sensitivity adjustment; γ Built-in temperature sensor; γ Two-color LED lights indicate equipment Working status; γ It has the function of automatically correcting the balance shaft.</p>



	MD-343	glass break detector	<ul style="list-style-type: none"> • Power supply mode: 12V • Alarm frequency 5Hz+20KHz • Alarm output: NO/NC relay output • Working temperature: -10~+50
	PL-9501	listening head	<ul style="list-style-type: none"> • DC12V DC power supply • Sensitivity -50dB • The transmission distance is more than 1000 meters
Wired door magnet/window magnet			
	MD-133A	Embedded door and window magnetic	<ul style="list-style-type: none"> • Embedded installation • Working distance: 15-20mm • Switch form: NC normally closed type • Shell material: ABS
	MD-136	Surface Mount Door and Window Magnetics	<ul style="list-style-type: none"> • Working distance: 35-45mm • Switch form: NC/NO normally open normally closed type • Contact capacity: 0.5A/100V/10W
	MD-155	Rolling shutter magnetic	<ul style="list-style-type: none"> • Working distance: 35-45mm • Switch form: NC/NO normally open normally closed type • Contact capacity: 0.5A/100V/10W
Wired sound and light siren			



	MD-312	sound and light siren	• Mono, anti-shear • 12VDC 300mA • 105(±3)dB • Red
	MD-214	sound and light siren	• 12VDC/300mA • 95(±3)dB • Red
	MD-314	sound and light siren	• 12VDC/300mA • 95(±3)dB • Blue
	MD-325	sound and light siren	• Mono, anti-shear • 12VDC 300mA • 105(±3)dB • Red\Blue optional
	MD-334	sound and light siren	• Dual tone, anti-shear • 12VDC 300mA • 120(±3)dB • Red\Blue optional
	MD-327	sound and light siren	• Dual tone, anti-shear • 12VDC 300mA • 120(±3)dB • Red\Blue optional




	MD-204	Siren	<ul style="list-style-type: none"> • 12VDC 300mA • 100(±3)dB • white
Wired Panic Button/Door Bell			
	PB-200	emergency button	<ul style="list-style-type: none"> • Oversized recessed button • Button self-locking • Contact capacity: 0.5A/30V • Built-in bus module
Detector bracket			
	PB-301	Detector bracket	<ul style="list-style-type: none"> • PC material, environmentally friendly and economical, high temperature resistance • Easy to install • The angle is adjustable to make the detection range of the detector more accurate • Suitable for various wall detectors • Beautiful appearance and reasonable price • A variety of appearances are available
	PB-302	Detector bracket	
	PB-303	86 boxes of detector brackets	
	PB-304 For FT-89	Universal detector bracket	



Shop online at <https://www.vedardalarm.com>



Product Image	model	Accessories		Features
		model	quantity	
microwave contrast				
	MCB-150	150m dual band	150M	
	PB-201D	Microwave debugging box		
Microwave and infrared composite floor-to-ceiling				
<p>Long life: Metal sealed launch tube. Life expectancy of more than 10 years</p> <p>Wide voltage: Adopt new switching power supply, voltage 8-32V</p> <p>Low power consumption: New university power management, power consumption reduced by 30%-70%</p> <p>Smart transmission: according to the received signal. Automatically adjust transmit power</p> <p>Digital frequency conversion: eight channel selection. Effectively prevent damage.</p>			<p>Digital display: transmit and receive synchronous display Optical lens: high-precision spherical optical focusing mirror;</p> <p>Step adjustment: two groups of independent stepping precision micro tune;</p> <p>Alarm output: wired and bus compatible;</p>	
	ABI-606	Bidirectional 6 sets of double beams 2*60 meters in both directions	warning light	


	ABI-606L	6 groups of double beams on both sides, 2*60 meters in both directions	louver	ÿ Single and dual systems optional, eight-segment digital frequency conversion; ÿ Height 160, 200cm optional; ÿ Optional warning lights or lighting and other decorations; ÿ Wired, bus, wireless optional; ÿ Intelligent anti-rain and fog function; ÿ PC shell and aluminum Alloy base; ÿ The optical axis can be adjusted without opening the case; ÿ Working voltage AC-220V
	ABI-1006	6 groups of double beams in both directions 2*100 meters in both directions	warning light	
	ABI-1006L		louver	
	ABI-608	8 groups of double beams in both directions 2*60 meters in both directions	warning light	
	ABI-608L		louver	
	ABI-1008	8 groups of double beams in both directions 2*100 meters in both directions	warning light	
	ABI-1008L		louver	
	DBL-608	8 groups of double beams in both directions 2*60 meters in both directions	warning light	ÿ Microwave + IR dual identification ÿ Height 160, 200cm optional; ÿ Self- contained system, wireless transmission; ÿ Eight-segment digital frequency conversion, free combination; ÿ Intelligent anti-rain and fog; ÿ PC shell, aluminum alloy base; ÿ No need to open the shell Adjust the optical axis; ÿ Power consumption 120mA ÿ Use voltage DC/10-36V AC/220V
	DBL-608L		louver	
	DBL-1008	8 groups of double beams in both directions 2*100 meters in both directions	warning light	


	DBL-1008L	8 groups of double beams on both sides, 2*100 meters in both directions	louver	ÿ DC10-36V AC/220V
	ABS-60	Fully wireless solar floor-to-ceiling perimeter beam	Built-in 6V/8AH battery	ÿ Powered by solar photovoltaic cells, ÿ True wireless transmission; ÿ Eight-segment digital frequency conversion, multi- segment free combination; ÿ Intelligent anti-rain and fog; ÿ PC shell, aluminum alloy base; ÿ The optical axis can be adjusted without opening the shell ; Power consumption: 4mA
Active infrared contrast				
ÿ Long life: The launch tube is encapsulated by metal. Service life of more than 10 years ÿ Wide voltage: using high frequency switching power supply, voltage range ÿ Low power consumption: New college power management, power consumption reduced by 30%-70% ÿ Intelligent transmission: According to the received signal. Automatically adjust the transmit power ÿ Digital frequency conversion: Eight channel selection. Effectively prevent damage.			ÿ Digital display: synchronous display of transmission and reception ÿ Optical lens: high-precision spherical optical focusing mirror; ÿ Step adjustment: two groups of independent step-by-step fine-tuning; ÿ Alarm output: wired and bus compatible;	
 <div>New appearance with digital tube display</div>	AX-302	With digital display 4 frequency conversion two beam infrared beam	30 meters outside	ÿ Working voltage: AC/8-20V DC/10-36V ÿ Working power consumption: <2W ÿ Alarm interface: DC30/100 ÿ Anti-fog output: DC30/100 ÿ Tamper output: DC30/100
	AX-602		60 meters outside	
	AX-802		80 meters outside	
	AX-1002		100 meters outside	






	AX-1003	With digital display 4 frequency conversion two beam infrared beam	100 meters outside	<div>Working voltage: AC/8-20V DC/10-36V</div> <div>Working power consumption: <2.5W</div> <div>Alarm interface: DC30/100</div> <div>Anti-fog output: DC30/100</div> <div>Tamper output: DC30/100</div>
	AX-1503		150 meters outside	
	AX-2003		200 meters outside	
	AX-2503		250 meters outside	
	ABT-30	With digital display 8 frequency conversion two beam infrared radiation	30 meters outside	<div>Working voltage: AC/8-20V DC/10-36V</div> <div>Working power consumption: <2W</div> <div>Alarm interface: DC30/100</div> <div>Anti-fog output: DC30/100</div> <div>Tamper output: DC30/100</div>
	ABT-60		60 meters outside	
	ABT-80		80 meters outside	
	ABT-100		100 meters outside	
	ABT-30B	With digital display 8 frequency conversion two beam infrared bus to shoot	30 meters outside	
	ABT-60B		60 meters outside	
	ABT-80B		80 meters outside	
	ABT-100B		100 meters outside	
	ABE-100	With digital display 8 frequency conversion three beam infrared radiation	100 meters outside	<div>Working voltage: AC/8-20V DC10-36V</div>
	ABE-150		150 meters outside	







	ABE-200	With digital display 8 frequency conversion three beam infrared radiation	200 meters outside	<p>• Working voltage: AC/8-20V DC/10-36V •</p> <p>Working power consumption: <2.5W • Alarm interface: DC30/100 • Anti-fog output: DC30/100 • Tamper output: DC30/100</p>
	ABE-250		250 meters outside	
	ABE-100B	With digital display 8 frequency conversion three beam infrared bus to shoot	100 meters outside	
	ABE-150B		150 meters outside	
	ABE-200B		200 meters outside	
	ABE-250B		250 meters outside	
	ABH-100	With digital display three-beam infrared beam	100 meters outside	<p>• Working voltage: AC/8-20V DC/10-36V •</p> <p>Working power consumption: <3W • Alarm interface: DC30/100 • Anti-fog output: DC30/100 • Tamper output: DC30/100</p>
	ABH-150		150 meters outside	
	ABH-200		200 meters outside	
	ABH-250		250 meters outside	
	ABL-50	Six-beam splittable dual-system active infrared detector	50 meters outside	<p>• Working voltage: AC/8-20V DC/10-36V •</p> <p>Working power consumption: <4W • Alarm interface: DC30/100 • Anti-fog output: DC30/100 • Tamper output: DC30/100</p>
	ABL-100		100 meters outside	

	ABL-150	Six-beam splittable dual-system active infrared detector	150 meters outside	DC/10-36V Working power consumption: <4W Alarm interface: DC30/100 Anti-fog output: DC30/100 Tamper output: DC30/100
	ABL-200		200 meters outside	
	ABL-250		250 meters outside	
	ABU-30	Two-beam omnidirectional digital infrared detector	30 meters outside	Working voltage: AC/8-20V DC/10-36V Working power consumption: <4W Alarm interface: DC30/100 Anti-fog output: DC30/100 Tamper output: DC30/100
	ABU-60		60 meters outside	
	ABU-80		80 meters outside	
	ABU-100		100 meters outside	
	ABU-150		150 meters outside	
Digital Inter-Effect Infrared Fence				
Long life: The launch tube is encapsulated by metal. Service life of more than 10 years Wide voltage: using high frequency switching power supply, voltage range Low power consumption: New college power management, power consumption reduced by 30%-70% Intelligent transmission: According to the received signal. Automatically adjust the transmit power Digital frequency conversion: Eight channel selection. Effectively prevent damage.			Digital display: synchronous display of transmission and reception; Optical lens: high-precision spherical optical focusing mirror; Step adjustment: two groups of independent step-by-step fine-tuning; Alarm output: wired and bus compatible;	

	ABX-104	4-beam mutual beam infrared grating	10 meters outside	• Working voltage: DC/10-36V • Working power consumption: <2.5W • Alarm interface: DC30/100 • Tamper output: DC30/100 • Height: 80CM
	ABX-204		20 meters outside	
	ABX-404		40 meters outside	
	ABX-604		60 meters outside	
	ABX-106	6-beam mutual reflection infrared grating	10 meters outside	• Working voltage: DC/10-36V • Working power consumption: <2.5W • Alarm interface: DC30/100 • Tamper output: DC30/100 • Height: 105CM
	ABX-206		20 meters outside	
	ABX-406		40 meters outside	
	ABX-606		60 meters outside	
	ABX-108	8-beam mutual reflection infrared grating	10 meters outside	• Working voltage: DC/10-36V • Working power consumption: <2.5W • Alarm interface: DC30/100 • Tamper output: DC30/100 • Height: 130CM
	ABX-208		20 meters outside	

	ABX-408	8-beam mutual reflection infrared grating	40 meters outside	• Working power consumption: <2.5W • Alarm interface: DC30/100 • Tamper output: DC30/100 • Height: 130CM
	ABX-608		60 meters outside	
	ABX-1010	10 beam mutual reflection infrared grating	10 meters outside	• Working voltage: DC/10-36V • Working power consumption: <2.5W • Alarm interface: DC30/100 • Tamper output: DC30/100 • Height: 160CM
	ABX-2010		20 meters outside	
	ABX-4010		40 meters outside	
	ABX-6010		60 meters outside	
	ABX-1012	12 beam mutual reflection infrared grating	10 meters outside	• Working voltage: DC/10-36V • Working power consumption: <2.5W • Alarm interface: DC30/100 • Tamper output: DC30/100 • Height: 180CM
	ABX-2012		20 meters outside	
	ABX-4012		40 meters outside	
	ABX-6012		60 meters outside	




Electronic fence host/keyboard				
	PPF-300	Dual zone pulse host LCD display		<ul style="list-style-type: none"> ÿ LCD display ÿ Working voltage: AC-220V DC-12V ÿ Strike voltage: 1-10/KV ÿ Strike volume: 1-5 joules ÿ Alarm mode: touch any line
	PPF-200	Dual zone pulse host		<ul style="list-style-type: none"> ÿ Working voltage: AC-220V DC-12V ÿ Strike voltage: 1-10/KV ÿ Strike volume: 1-5 joules ÿ Alarm mode: touch any line
	FC-EFKB	Electronic fence control keyboard		<ul style="list-style-type: none"> ÿ Chinese display ÿ Can realize the programming of the host ÿ Can implement partition management on the front end ÿ Can realize group function ÿ Can control 99 host ÿ The computer can be detached to work independently
	FC-SZK1.0	controlling software		<ul style="list-style-type: none"> ÿ Community security comprehensive management software ÿ Split screen display ÿ Adjustable front-end voltage strike volume management ÿ Can be grouped to arm and disarm ÿ Automatic or manual alarm linkage ÿ Integrated telephone, network GPRS alarm
Electronic fence accessories				
	FC-GYX-01	High voltage insulated wire		ÿ Single-strand aluminum core high-voltage line
	FC-GYX-02	High voltage insulated wire		ÿ Multi-strand aluminum core high-voltage line

	HY5WS	lightning arrester		ÿ Special for electronic fence ÿ Bracket included
	FC-FYX	rain box		ÿ Cold-rolled sheet spraying
	FC-CLG	bearing rod	9.5mm	ÿ FRP material ÿ Excellent bending resistance ÿ Good insulation
			18mm	
			25mm	
	FC-JYXJ	Insulated wire rack	9.5mm	ÿ Engineering PC material ÿ Durable
			18mm	
			25mm	
	FC-FYM/CLG	Bearing rod rain cap	9.5mm	ÿ Engineering PC material ÿ Durable
			18mm	
			25mm	
	FC-CLGDZ-1	Bearing rod base	9.5mm	ÿ For vertical installation ÿ Engineering PC material ÿ Durable
			18mm	
			25mm	

	FC-CLGDZ-2	Bearing rod base	9.5mm	ÿ For wall side installation ÿ Engineering PC material ÿ Durable
			18mm	
			25mm	
	FC-ZDGJYZ	Terminal rod insulator		ÿ For wall side installation ÿ Engineering PC material ÿ Durable
	FC-JXQ	tensioner		ÿ For wall side installation ÿ Engineering woolen dragon material ÿ Durable
	FC-XXLJQ	line connector		ÿ Alloy material ÿ No rust ÿ Low resistance between lines
	FC-DGLHJX	High-strength single-strand aluminum alloy wire ÿ1.8mm (500m/disk)		ÿ Magnesium alloy wire ÿ No rust
	FC-DGLHJX	High-strength multi-strand aluminum alloy wire ÿ1.8mm (500m/disk)		
	FC-JSP	fence warning sign		ÿ Size: width*height*thickness=20x14x1.2mm ÿ PC material ÿ can be customized



Shop online at <https://www.vedardalarm.com>

	FC-110-22 Full Chinese digital alarm receiver		• Chinese display, can be used independently from the computer • ContactID 4+2 communication protocol for free arming/disarming
	FC-110-32	Digital relay alarm card	• Two digital trunk ports, 64 channels of telephone access • ContactID 4+2 FSK SIA communication protocol
	MonitorNET 5.0	Centralized management platform	• Monitor5.0 Super Edition • In theory, it can achieve a unified platform across the country • Support both C/S and B/S clients • Partition independent management. • With management function • Support SP SMS sending







Focus®
福 科 斯

Shop online at

<https://www.vedardalarm.com>

Campus one-button video alarm host (DVR/NVR as TCP/IP main communication GPRS as backup communication)

	EAVS-2504F TCP/IP+GPRS stand-alone (3520D-V400)	8*1080PNVR	PB-403R Remote Control	Video features: • Video access: 8*IPC1080P • Synchronous playback: 4*IPC1080P • Compression method: H.265 • System performance: preview/record/playback/backup/network monitoring. • Dual identification of moving image alarm and probe space intrusion alarm. • Support mobile APP video monitoring, as well as PTZ and home appliance control. • Support P2P/IE control/platform/Onvif protocol. Alarm features: • System capacity: 4 wired + 32 wireless + 64 bus zone + 16 electrical control. • Fortification method: overall arming and disarming, 8 divisions arming and disarming, independent arming and disarming. • Telephone communication: 2 alarm centers, 4 voices, 2 free arming and disarming. • GSM communication: four voice calls, SMS arming and disarming GPRS network communication. • IP communication: IE programming, remote upgrade, remote control, alarm networking. • Alarm mode: fire alarm, emergency help, emergency call one-button alarm. • Unique features: voice prompts, two-way intercom, on-site monitoring, regular arming and disarming, and direct connection to the campus broadcasting system. • Extended function: relay linkage, programmable output. • Wireless networking: FSK wireless networking.
	EAVS-2504F PLUS TCP/IP+GPRS stand-alone (3520D-V400)	8*1080PNVR	PB-403R Remote Control	Video features: • Video access: 8*IPC1080P • Synchronous playback: 4*IPC1080P • Compression method: H.265 • System performance: preview/record/playback/backup/network monitoring. • Dual identification of moving image alarm and probe space intrusion alarm. • Support mobile APP video monitoring, as well as PTZ and home appliance control. • Support P2P/IE control/platform/Onvif protocol. Alarm features: • System capacity: 4 wired + 32 wireless + 64 bus zone + 16 electrical control. • Fortification method: overall arming and disarming, 8 divisions arming and disarming, independent arming and disarming. • Telephone communication: 2 alarm centers, 4 voices, 2 free arming and disarming. • GSM communication: four voice calls, SMS arming and disarming GPRS network communication. • IP communication: IE programming, remote upgrade, remote control, alarm networking. • Alarm mode: fire alarm, emergency help, emergency call one-button alarm. • Unique features: voice prompt, two-way intercom, on-site monitoring, timing deployment • 86
	PB-200R (FSK) Wireless	Emergency Button		electrical box structure • Surface mountable • Timing status report • 433/868MHz • ASK/FSK optional
	HA-8406	Multifunctional network infrared camera	2 million	• Resolution: 2MP(1920*1080) • Compression method: H.265 • Storage method: • 128GSD card, cloud storage. • Network interface: 10Mbps/100Mbps adaptive/RJ45 interface; • Network protocol: TCP/IP, HTTP, etc. • Support IP address: static IP address, dynamic IP address; • Intelligent analysis: with humanoid recognition, with early warning function. • Voice function: support remote monitoring. • Day and night mode: Dual filters automatically switch IR-CUT day and night.