










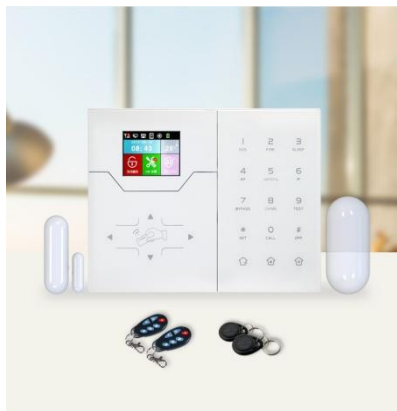




Shop at <https://www.vedardalarm.com>

Picture	Model	Accessory		Features	Shopping link
		Model	Quantity		
4G and TCP/IP network App monitoring alarm panel					
	HA-VGT basic package	MC-565R PIR	1	Brilliant color screen display, menu operation. Full voice prompt, full touch glass panel. 32 wireless defense zones, two-way wireless communication. Built-in GSM module, support GPRS data transmission. Built-in TCP/IP module, support network data transmission. 16-way electrical control, electrical switch timing control. Real-time monitoring of battery undervoltage of wireless detectors; regular arming/disarming. RF card swipe to arm and disarm; remote off-site arming, disarming, and on-site monitoring. Mobile APP remote operation control. Computer IE remote operation control. Set 32 defense zones that can be associated with video through the APP. Built-in rechargeable lithium battery 3.7V 1600mAh 433MHz/868MHz frequency optional, ASK wireless networking.	https://vedardalarm.com/wifi-2g-4g-home-intruder-security-system-app-alarm-p-262
		MD-211R Door contact	1		
		PB-403R Remote	2		
		RF card	2		
		Power adapter	1		
		IP camera			



	HA-8501	Multifunctional network infrared dome camera	2 million	<p>Resolution: 2MP(1920*1080) method: H.265 128GSD card, cloud storage. 10Mbps/100Mbps adaptive/RJ45 interface; Network protocol: TCP/IP, HTTP Compression method: H.265 Storage method: 128GSD card, cloud storage. Network interface: 10Mbps/100Mbps adaptive/RJ45 interface; Network protocol: TCP/IP, HTTP Support IP address: static IP address, dynamic IP address; Intelligent analysis: with humanoid recognition, with early warning function. Voice function: with voice prompt function, two-way voice intercom, remote monitoring. Day and night mode: Dual filters automatically switch IR-CUT day and night. Support mobile APP video monitoring, and remote control. Alarm notification: FTP uploading pictures and videos, SMS alarm and other notification methods (requires server cooperation) Support P2P/IE control/platform/Onvif protocol. Support wifi, support audio configuration. Android USB interface, DC5V 1A power supply. Shell: plastic shell, suitable for indoor use. Size: 85*66mm</p>	https://vedardal.com/-c-20/-p-202
---	---------	--	-----------	--	---

	HA-8403	Multifunctional network dual light dot matrix camera	2 million	Resolution: 2MP(1920*1080) Compression method: H.265 Storage method: 128GSD card, cloud storage. Network interface: 10Mbps/100Mbps adaptive/RJ45 interface; Network protocol: TCP/IP, HTTP, etc. Support IP address: static IP address, dynamic IP address; Intelligent analysis: with humanoid recognition, with early warning function. Day and night mode: Dual filters automatically switch IR-CUT day and night. Support mobile APP video monitoring, and remote control. Alarm notification: FTP uploading pictures and videos, SMS alarm and other notification methods (requires server cooperation) Support P2P/IE control/platform/Onvif protocol. Support wifi, support audio configuration. Plastic shell, suitable for indoor use. DC interface, 12V 1A power supply. Shell: metal shell, waterproof grade IP65, suitable for indoor and outdoor. Size: 118*70*63mm	https://vedardalarm.com/-c-20/-p-258
Wireless outdoor solar power intruder detector					
	FT-89RS	Wireless Outdoor Quad Tech Detector		Detection method: DG-89R--2*PIR FT-89R--2*PIR+MW Detection distance: 9m/12m/18m at Detection angle: 110° /90° /30° Use battery: 2x18650 Battery life: more than 3 years Transmit frequency: 433MHz/868MHz optional	https://vedardalarm.com/-c-7/-p-54
Wireless indoor intrusion detector					

	DM-7380R	Wireless ceiling mounted room intrusion detector	Detection method: dual-element passive infrared Detection distance: 6 meters in diameter Installation height: 2.4—3.6 meters Use battery: 2*AA Static Anti-pet power consumption: <15uA function: <15KG	https://vedardalarm.com/-c-18/-c-18 3/-p-27
	DM-448R (with direction recognition)	Wireless curtain PIR	Detection method: dual-element passive infrared Detection distance: 0.8*9m@25° C Detection angle: 10° Use Static power battery: 2*AA Anti-pet function: consumption: <15uA <15KG	https://vedardalarm.com/-c-18/-c-18 3/-p-26
	MC-565R	Wireless indoor PIR detector	Detection method: dual-element passive infrared Detection distance: 12M Detection angle: 110° Use battery: 1*CR123 Anti-pet function: <15KG Networking Static power consumption: <15uA method: ASK Transmission frequency: 433MHz	https://vedardalarm.com/-c-18/-c-18 3/-p-260
Wireless fire detectors				
	MD-2105R	Wireless smoke detector	wireless output smoke detector Power supply mode: 2*CR123 Sensitivity: 2.06%ft±1.3%ft Operating Alarm output: 85dB temperature: -10℃~+50℃ Transmitting frequency : 433MHz	https://vedardalarm.com/-c-8/-p-194
	MD-2000R	Wireless gas detector	Nano sensor, automatic reset when the alarm is excluded; Measurable gas: natural gas, coal gas, liquefied petroleum gas; Buzzer volume: 85dB Power supply: AC16.5V/DC12V-15V Transmission frequency: 433MHz	https://vedardalarm.com/-c-8/-p-44

Wireless environment security sensor				
	MD-230R	Wireless Flooding Detector	Alarm output: normally open and normally closed output Wireless transmission distance (open space): more than 180 meters Transmission frequency: 433MHz	https://vedardalarm.com/-c-8/-p-173
	MD-231R	Wireless Flooding Detector	Transmission	
	MD-343R	Wireless Glassbreak Detector	Detecting the breaking sound of ordinary glass, tamper-proof glass, laminated glass, wire glass, film glass, double insulating glass; Adjustable sensitivity range: the maximum range is 4.6m, and there is no minimum distance in all directions; Power supply voltage: 3V (CR123 battery) Working current: about 15mA (when alarming); about 35uA(when static) Wireless transmission distance: 100m (open space) Transmission frequency: 433MHz	https://vedardalarm.com/-c-18/-c-18 4/-p-179
	MD-2018R	Wireless Vibration Detector	Adopt vibration, touch, mobile omnidirectional detection principle; ÿ Vibration sensitivity is divided into three gears: high, medium, low; freely change the sensitivity; Has low battery indicator; ATM etc. Transmission frequency: 433MHz	https://vedardalarm.com/-c-18/-c-18 3/-p-32
Wireless door contact				
	MD-211R	Wireless door contact	Magnetic range: 2.5CM Transmission distance: 250m Battery: CR123A method: Surface mount Transmission frequency: 433MHz Installation Networking mode: ASK	https://vedardalarm.com/-c-18/-c-18 3/-p-257

	MD-212R	Wireless rolling door sensor	Magnetic range: 1.8CM Transmission distance: 250m Use battery: CR123 method: Surface mount Transmission frequency: 433MHz	Installation	https://vedardalarm.com/-c-18/-c-18-3/-p-31
Wireless siren strobe					
	MD-314R	无线声光警号 (含电源DC5V 2A)	◎ 直流电源: DC12V ◎ 内置电池: 5V 2000mAh ◎ 工作方式: 双向收发 ◎ 警笛声响: >100 dB ◎ 发射频率: 433MHz/868MHz可选		https://vedardalarm.com/-c-19/-c-19-5/-p-96
	MD-313R	无线声光警号	◎ 内置电池: 3*A 电池 ◎ 工作方式: 双向收发 ◎ 警笛声响: > 110 dB ◎ 组网方式: ASK/FSK可选 ◎ 发射频率: 433MHz/868MHz可选		https://vedardalarm.com/-c-19/-c-19-5/-p-281
	MD-313R (FSK)				
Wireless panic button					
	PB-200R	无线紧急按钮	◎ 86电工盒结构 ◎ 可表面安装 ◎ 定时状态报告 ◎ 433/868MHz ◎ ASK/FSK可选		https://vedardalarm.com/-c-19/-c-19-6/-p-91
	PB-201R	Wireless emergency button	emergency button Waterproof grade IP55 433MHz		https://vedardalarm.com/-c-19/-c-19-6/-p-92

	PB-202R	Wireless emergency button	emergency button Waterproof grade IP55 433MHz	https://vedardal.com/-c-19/-c-19-6/-p-282
Smart switch				
	PL-708R	Smart switch	Shell material: high-strength tempered glass / flame retardant PC Frame: silver/gold optional, aluminum alloy Panel: white/black optional Control method: APP control and manual control Working voltage: 220V Limited current : 5A Single key load: 500W Service life: When the relay contacts are fully loaded at 220V, the service life is more than 100,000 times Dimensions: W86mm*H86mm	https://vedardal.com/-c-19/-c-19-6/-p-93

